



NLR-TP-2013-383

## **Harness De-rating Test Facility (HDTF) for Aerospace Applications**

R.C. van Benthem and W. de Grave

**Nationaal Lucht- en Ruimtevaartlaboratorium**

National Aerospace Laboratory NLR

Anthony Fokkerweg 2

P.O. Box 90502

1006 BM Amsterdam

The Netherlands

Telephone +31 (0)88 511 31 13

Fax +31 (0)88 511 32 10

[www.nlr.nl](http://www.nlr.nl)



## Executive summary

# Harness De-rating Test Facility (HDTF) for Aerospace Applications



*TV chamber at NLR proposed to be used for the HDTF*

### Report no.

NLR-TP-2013-383

### Author(s)

R.C. van Benthem  
W. de Grave

### Report classification

UNCLASSIFIED

### Date

March 2018

### Knowledge area(s)

Space Applications

### Descriptor(s)

Harness  
De-rating  
power  
heating  
temperature

### Problem area

SAE-AS-50881 does not cover all relevant environmental conditions for wiring bundles in aircraft leaving unpredictable margins in the design. The objective of the Harness de-rating test facility (HDTF) is to improve validation of a Thermal Design Module (TDM1) for the prediction of wire bundle temperatures in aircraft enclosures for weight reduction and improved safety.

### Description of work

Objective of this report is to present an overview of the existing TDM Validation test facility and the HDTF for space harness designs which is in development.

### Results and conclusions

The result of this study is the specification of the requirements and rough outlay of the HDTF. This is to be used for detailed design of the HDTF.

This report is based on a presentation held at the Space Passive Component Days, 1st International Symposium, Noordwijk, September 24-26, 2013.

**Applicability**

Thermal measurements of wiring bundles in aircraft, satellites, launchers etc. to reduce weight and improve safety.

NLR-TP-2013-383



## Harness De-rating Test Facility (HDTF) for Aerospace Applications


R.C. van Benthem and W. de Grave

This report is based on a presentation held at the Space Passive Component Days, 1st International Symposium, Noordwijk, September 24-26, 2013.

The contents of this report may be cited on condition that full credit is given to NLR and the authors.

Customer National Aerospace Laboratory NLR  
Contract number ---  
Owner National Aerospace Laboratory NLR  
Division NLR Aerospace Systems  
Distribution Unlimited  
Classification of title Unclassified  
March 2018

Approved by:

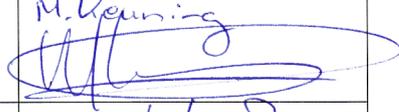Author W. de Grave 	Reviewer R.C. van Benthem 	Managing department M. Keuning 
Date: 13-03-2018	Date: 05-03-18	Date: 20/2/2018





## Summary

SAE-AS-50881 does not cover all relevant environmental conditions for wiring bundles in aircraft leaving unpredictable margins in the design. The objective of the Harness de-rating test facility (HDTF) is to improve validation of a Thermal Design Module (TDM1) for the prediction of wire bundle temperatures in aircraft enclosures for weight reduction and improved safety.

This report presents an overview of the existing TDM Validation test facility and the HDTF for space harness designs which is in development. The requirements and rough outlay of the HDTF is specified, which is to be used for detailed design of the HDTF.



This page is intentionally left blank.

## Contents

<b>Abbreviations</b>	<b>6</b>
<b>1 Introduction</b>	<b>7</b>
<b>2 Harness Derating Test Facility for convective environments</b>	<b>8</b>
2.1 Climate Chamber	8
2.2 Facility equipment	8
2.3 Sample measurements	9
<b>3 Design of the Harness Derating Test Facility for space environments</b>	<b>10</b>
3.1 TV chamber	10
3.2 Adiabatic walls	11
3.3 Solar heat input	13
3.4 Samples and interfaces	13
3.5 Temperature measurements	13
3.6 Power measurements	13
3.7 Pressure	13
<b>4 Outlook</b>	<b>14</b>
<b>References</b>	<b>15</b>



## **Abbreviations**

AWG	American Wire Gauge
ECSS	European Cooperation for Space Standardization
ESA	European Space Agency
HDTF	Harness Derating Test Facility
IR	Infra-Red
NLR	National Aerospace Laboratory
SAE	Society of Automotive Engineers
TDM	Thermal Design Module
TV	Thermal Vacuum

## 1 Introduction

Now-a-days electrical engineers in the aerospace industry around the world use derating rules from SAE AS50881<sup>1</sup> or ECSS-30-11C<sup>2</sup> when designing wiring bundles for aircraft and space systems without consideration about their validity. However, the derating rules follow the successive series of the military standards MIL-W-5088s that are basically unchanged since the early 50s. The derating rules are based on natural convective cooling of free wires in air and have been updated for load conditions for wires in bundles in the 70s. For space environments derating rules are based on IR cooling and a few tests. As such the derating rules respect *general worst case* conditions indiscriminately to be applied for the whole harness (also where it might not be needed) but at the other hand do not consider *local worst case* environmental conditions as found for harnesses in modern systems to their full extend. Narrow or insulated enclosures, the use of structural composite materials with low thermal conductance, solar radiation and hot surfaces are neglected in the derating rules. This situation leads to large uncertainties and potential failures with respect to the actual wiring temperatures in aerospace systems. Modelling and prediction of wire temperatures could therefore improve bundle designs in terms of weight and safety<sup>3</sup>. The Harness Derating Test facility is developed by NLR (Fig. 1.) for the aircraft industry for wire temperature verification and to validate thermal models for harnesses. This has been done by testing bundle samples to their designed power within a typical worst case enclosure as found in aircraft. The paper describes The Harness Derating Test Facility for *convective environments* by measuring steady state temperatures of wires in bundles at several current levels (0-20A), air pressures between 1 - 10<sup>-3</sup> bar and sink temperature between -70°C to +100°C. In this paper NLR proposes extension of the Harness Derating Test Facility for simulated *space conditions* by placement inside a Thermal Vacuum (TV) chamber. With this arrangement space harness designs can be tested under full vacuum (<10<sup>-5</sup> mbar) or low pressure conditions (i.e. simulated Mars CO<sub>2</sub> atmosphere) and sink temperatures between -150°C to +150°C. Derated temperatures of other space components such as connectors, resistors and heaters could also be verified with this facility.



*Fig. 1. Photograph of the HDTF for convective environments on a rotatable bench inside NLRs Climate Chamber.*

## **2 Harness Derating Test Facility for convective environments**

The following facility has been developed by NLR for verification of the derated temperatures of aircraft harness designs in the range of 5-39 mm bundle diameter in 2008.

### **Facility Description**

#### **2.1 Climate Chamber**

A cylindrical tube (Length 760 mm; ID=200 mm) is placed on a bench in a temperature controlled climate chamber (range -70 to +100°C) (see Fig. 2.). The bench can be positioned at an angle between the horizontal and about 45°. A sample bundle (effective length ca. 1 m length, tested length 680 mm) with thermocouples is installed inside the cylindrical tube. When applying low pressures a hermetical (air leak tight) sealing is achieved by using connectors for current feed-through of the sample.

#### **2.2 Facility equipment**

Programmable power units (up to 100A) are available allowing for adjustable current control. A scroll vacuum pump in combination with an electronic valve is applied to control the cylinder internal air pressure (range 15 mBar to 1 Bar). A tubular square shaped copper cold sink is

available to simulate convection circulation and heat radiation/conduction. The top and bottom sinks are uniformly cooled down to  $-40^{\circ}\text{C}$  with a fluid loop provided by a thermostat bath outside the climatic chamber. The sidewalls are black painted and externally insulated. Guard heaters are additionally applied to minimize any heat flow through the sidewalls by controlling the internal and external temperature gradient to zero.

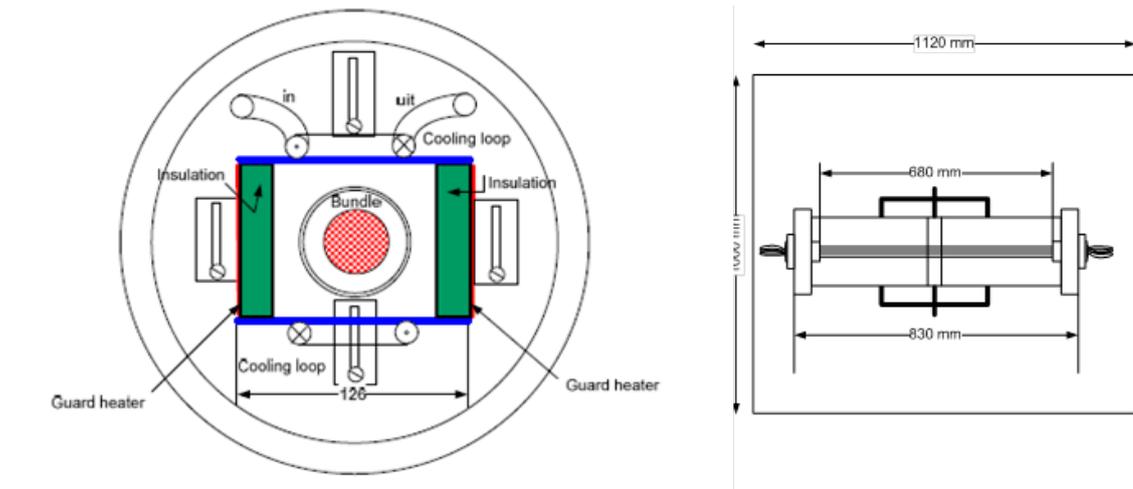


Fig. 2. Cross-section of the HDTF for convective environments in horizontal set-up.

### 2.3 Sample measurements

The cable- / wire bundles are equipped with temperature sensors (thermocouples) to measure the temperatures of the individual wires on several axial locations. Also the temperature of the facility wall is measured. Measurements can be performed on steady state and transient powers. A transient test cases (duty cycle) allow for a temporarily higher current when taking the wire/bundle heat capacity into account. Below (Fig. 3.) an example is given of a  $D=17.5$  mm bundle with AWG 4 (2x), AWG 12 (4x), AWG 16 (6x), AWG 18 (14x) and AWG 20 (18 x) wires in a  $25^{\circ}\text{C}$  air environment. The four thick lines at the top of the graph (see Fig. 3) are some measured wire temperatures at 20% above its derated current (44 W) at 1 bar, whereas the four lines in the middle of the graph are the measured wire temperatures at 20% below its derated currents (29 W) at 72 mbar (The ripple is due to the power control equipment). The derated current is specified as the current which rises the inner bundle temperature to  $150^{\circ}\text{C}$  at an ambient temperature of  $70^{\circ}\text{C}$  at 72 mbar.

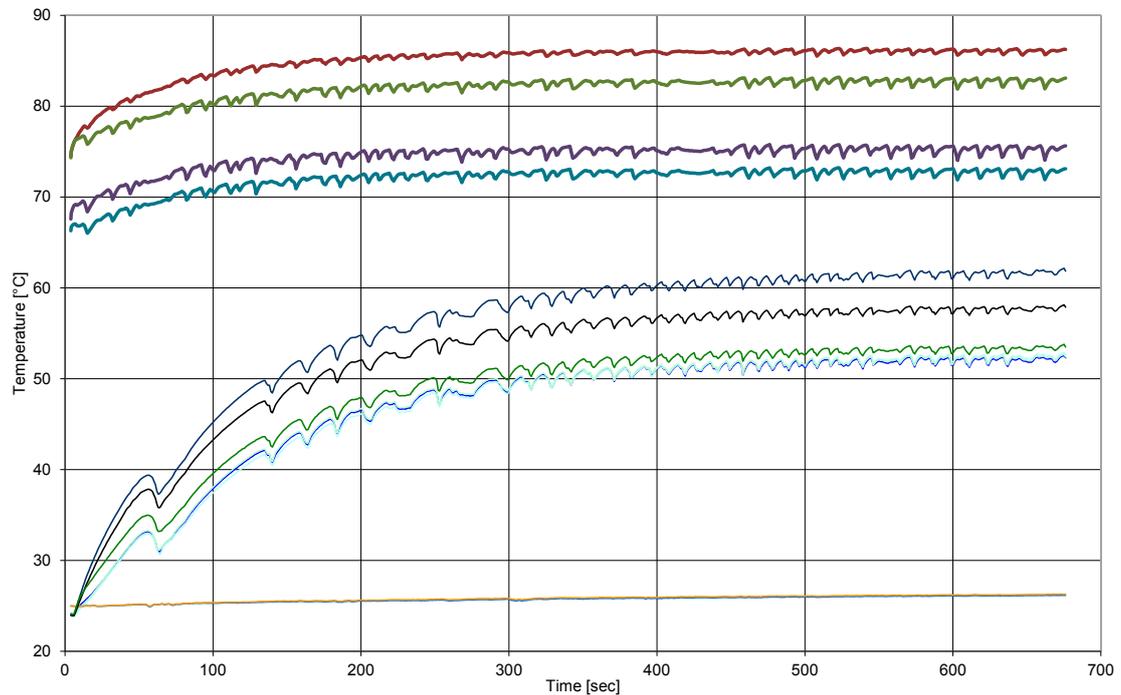


Fig. 3. Measured temperatures of an aircraft cable bundle  $D=17.5\text{mm}$  (with braid) in  $25^\circ\text{C}$  air for a 20% above rated currents at 1 bar (4 thick upper lines) and 20% below rated current at 72 mbar (4 thin lines at the middle) at an ambient temperature of  $25^\circ\text{C}$  (lower line).

### 3 Design of the Harness Derating Test Facility for space environments

The following facility is proposed for verification of the derated temperatures for space harnesses. The design has been based on the experiences with the existing facility for convective environments. Major proposed improvements are the low pressure conditions (vacuum), cold sink temperature range down to  $-150^\circ\text{C}$  and adjustable enclosure dimensions. An overview of the facility specification is given in Table 1.

#### Facility Description:

##### 3.1 TV chamber

Samples are placed horizontally in the Thermal Vacuum (TV) chamber at NLR (see Fig. 4.) and surrounded by (up to) six adiabatic walls simulating the desired enclosure dimensions, layout and temperature environment (see Fig. 4.). The enclosure configuration is fixed prior to the closing of the TV chamber door. Cooling of these walls is performed by radiation to the shroud of the TV chamber, which has a temperature range between  $-150^\circ\text{C}$  to  $+150^\circ\text{C}$  (without heat load). Heating is performed by electrical heaters on the back of the adiabatic walls. The

adiabatic walls are movable so that an enclosure can be created with a fixed length but with an adjustable width and height.



*Fig. 4. Photograph of the TV chamber at NLR proposed to be used for the HDTF for space harness designs.*

### **3.2 Adiabatic walls**

The adiabatic walls are made of two conducting plates separated by a gap. The front plate (as seen from the test sample) is only equipped with temperature sensors. The corresponding back plate is equipped with heaters and temperature sensors. A controller keeps the front plate on the desired temperature or ensures a zero temperature gradient. With these adiabatic walls it is possible to prevent heat to flow through these walls, or to simulate a satellite panel with a pre-defined temperature. The suspension of the adiabatic walls is to be designed, but will be done with stainless steel cables and stand-offs.

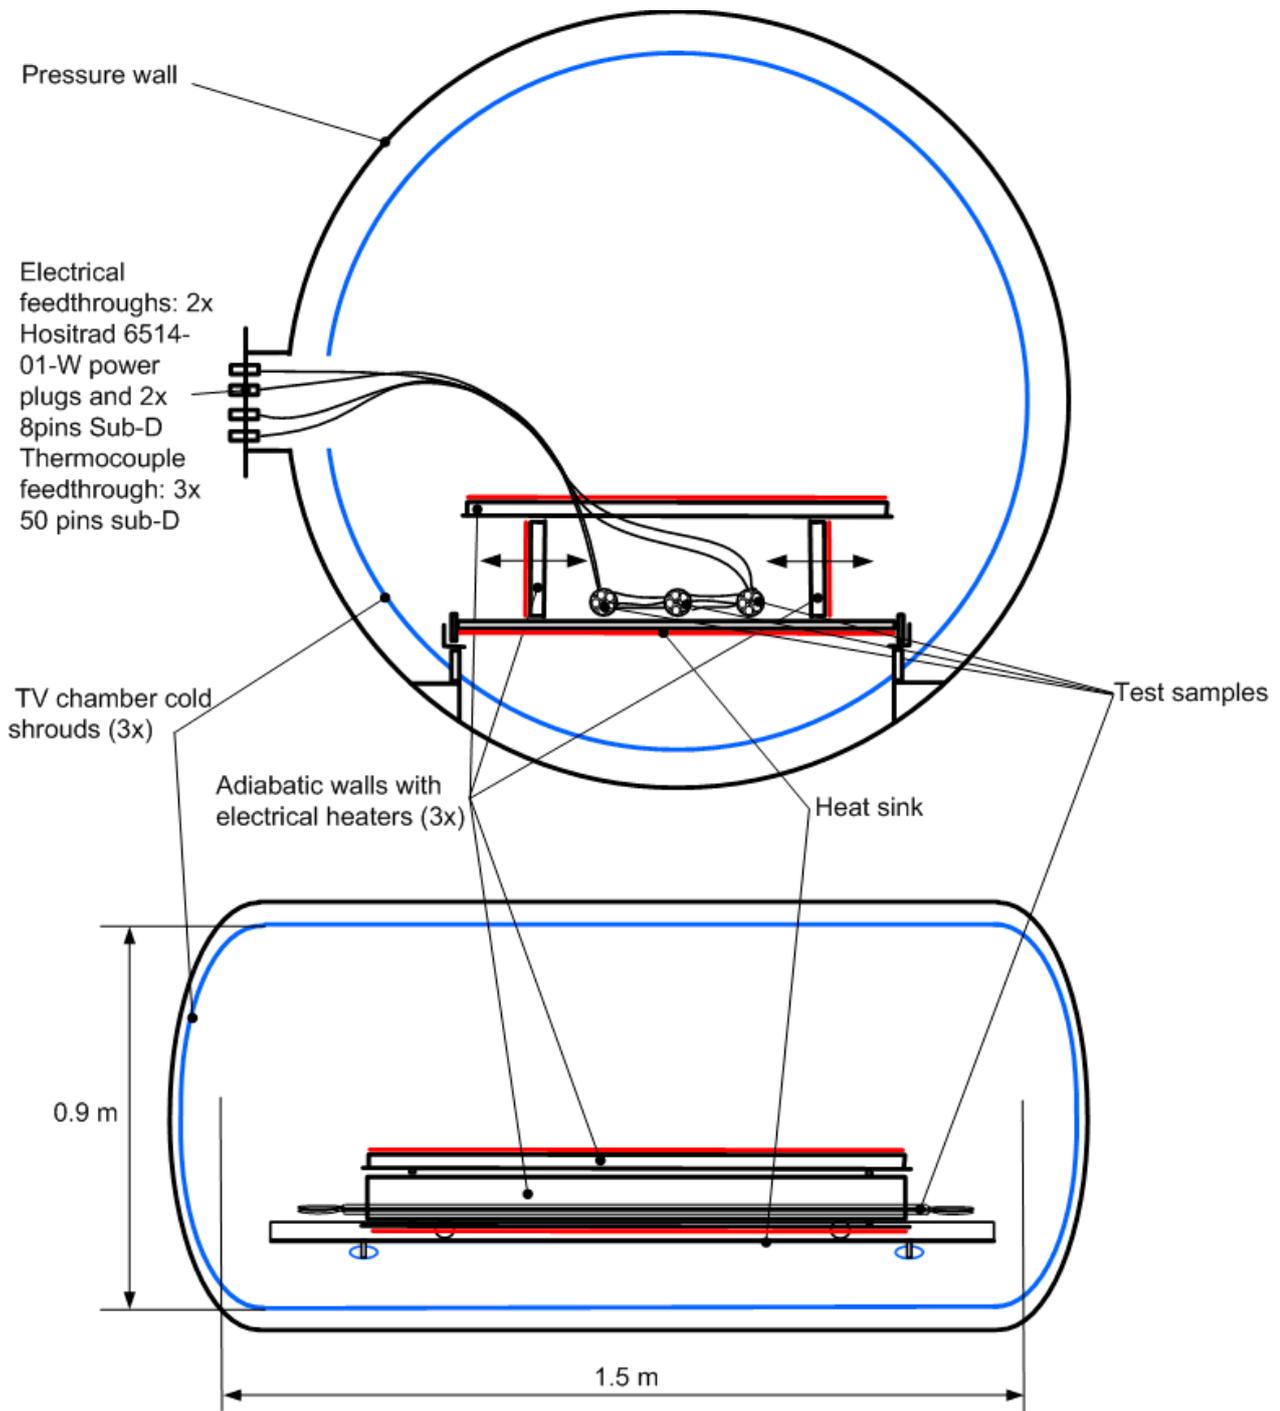


Fig. 5. Cross sections of the proposed HDTF for space environments with a sample bundle suspended in a TV chamber at NLR with adjustable and temperature controlled walls.



### **3.3 Solar heat input**

To simulate the solar heat input in earth orbit one of the adiabatic walls can be heated to 170°C, which can provide the sample with a radiation influx equal to one solar power. This way a configuration with a component on the outside of a satellite exposed to solar radiation can be tested.

### **3.4 Samples and interfaces**

Samples consist of a wire- or cable bundle, a series of bundle positioned next to each other, connectors, heaters etc. The samples are connected via sub-D through-puts to the power supplies outside the TV chamber. A bundle with at least four different types of wire (with each an adjustable current) will be possible to test, and each wire can be looped numerous times to get the desired test bundle.

### **3.5 Temperature measurements**

The test facility is equipped with thermocouples to measure and control the temperatures of the adiabatic walls. The test sample will be equipped with thermocouples to obtain a thorough understanding of the temperatures distribution inside tested sample. For cable bundles for example, on several axial sections multiple thermocouples can be installed throughout the cross-section of the bundle.

### **3.6 Power measurements**

The voltage drop over the tested part of the sample is directly measured with cross wires. The current is accurately measured (<1%) by the voltage drop over a calibrated measurement resistance.

### **3.7 Pressure**

The pressure inside the TV chamber will be below  $1 \times 10^{-5}$  mbar or any other pressure up to 1 bar.

*Table 1: Specifications for the Harness Derating Test Facility*

	<b>Existing (convective)</b>	<b>Proposed (space)</b>
<i>Facility</i>	Temperature controlled climate chamber	Vacuum chamber with temperature controlled shroud
<i>Enclosure envelop (bxh)</i>	Fixed 86 x 84 mm	Variable 100 x 100 to 500 x 500 mm ( <i>TBD</i> )
<i>Orientation</i>	Horizontal/Vertical	Horizontal
<i>Sample bundle dimensions</i>	L= 1m D=5-40 mm	L=1 m D= 1-40 mm ( <i>TBD</i> )
<i>Cold sink/shroud temperature range</i>	-60°C to + 100°C	-150°C to + 150°C
<i>Temperature controlled walls</i>	2x adiabatic	4x adiabatic or heated
<i>Pressure range (air)</i>	1 to 1000 mbar	<10 <sup>-5</sup> mbar – 1000 mbar
<i>Solar heat input</i>	-	Heated wall ( <i>TBD</i> )
<i>Current sources</i>	5 different currents up to 100 A	5 different currents up to 100 A
<i>Through connectors/number of pins</i>	4 x 28 Deutch	2x 8pins SubD 2 pins welded
<i>Current rating pins</i>	4x4 pins 17 A 4x24 pins 5 A	16 x 20 A 2 x 100 A
<i>Number of thermocouples (type -T)</i>	48	75

TBD= To Be Designed

## 4 Outlook

With the development of the HDTF for aircraft harness designs doubts about the margins applied in the derating standards could be substantiated. Development of a new facility is proposed for verification of the derating rules for space harness designs. The European Space Agency (ESA) is interested in this development since the new HDTF could lead to an update of the ECSS specifications leading to improved space bundle designs, smaller bend radii and an overall lower harness mass. Realisation of the HDTF for space applications depends on industrial and governmental financial support which is not to be expected before 2014.

## References

- [1] ECSS-Q-30-11C, Space product Assurance, Derating - EEE components
- [2] SAE AS50881D, Aerospace Vehicle Wiring
- [3] THERMAL ANALYSIS OF WIRING BUNDLES FOR WEIGHT REDUCTION AND IMPROVED SAFETY, Roel van Benthem , Wubbo de Grave, Fennanda Doctor, Simon Taylor , Kees Nuyten , Pierre-Alexis Jacques Dit Routier, 41th International Conference on Environmental Systems (ICES), Portland, USA, 17 - 21 Jul 2011