



NLR-TP-98448

A pilot model for helicopter manoeuvres

J. van der Vorst



NLR-TP-98448

A pilot model for helicopter manoeuvres

J. van der Vorst

This report is based on a presentation held at the 24th European Rotorcraft Forum, Marseille, France, 15-17 September 1998

The contents of this report may be cited on condition that full credit is given to NLR and the author.

Division:	Flight
Issued:	January 2001
Classification of title:	Unclassified

Summary

Since helicopter handling qualities are becoming more and more important, there is a need for tools to analyse these qualities. The primary goal of the research described in this paper was the development of a pilot model with which offline simulations can be performed of “piloted” helicopter manoeuvres, such as ADS33D Flight Test Manoeuvres. In order to develop such a pilot model, a literature study was performed about the types of pilot models available. Furthermore, to determine the underlying structure of the controlling and guiding process, pilots were interviewed about how they executed certain manoeuvres and discerned the various phases within a manoeuvring task.

The control model structure contains a so-called “high-level”, “mid-level” and a “low-level” structure. These levels are associated with navigation (long-term course & altitude control), guidance (mid-term speed and position control) and stabilisation (short-term attitude control) respectively. These sub-models were implemented in sequence. For the navigation module use was made of specific user-defined directives, mostly obtained from questionnaires. For the guidance module PID-controllers per control axis were developed. For the stabilisation module the Structural Pilot Model was applied containing typical human structural elements. The helicopter model used is a 6 DOF non-linear model, using closed-form equations for the main rotor. The BO-105 helicopter has been modelled, since much flight test data from DLR was available to develop and tune the model.

The pilot/helicopter model was validated by comparing simulation results with actual flight test data. Two ADS33 manoeuvres were simulated, one longitudinal manoeuvre, the accel/decel, and one lateral manoeuvre, the sidestep. The simulation responses compared quite well with the flight test data. Off-axis responses were not predicted quite well, however, these might be improved by including feed-forward (anticipation) in the pilot model and by improving the fidelity of the helicopter model.

Feasibility of the suggested model structure has been demonstrated. However, implementation of the manoeuvre to be flown required extensive piloting task analysis. Tuning of the model using flight data is required to match the model parameters in order to derive predictive capability.

There are several future applications for the model. The complete model structure lends itself to help build a pilot model that allows handling quality ratings (like “Cooper-Harper”) to be given. The model may also shed light on the fidelity of the cues provided by a flight simulator.



Contents

Summary	3
Notation	5
1 Introduction	7
2 Literature study	8
3 Structure of the pilot model	11
4 Helicopter model	14
5 Simulation results of the helicopter/pilot model	15
5.1 ADS33D accel/decel manoeuvre	15
5.2 ADS33D sidestep manoeuvre	17
6 Conclusions and recommendations	19
6.1 Conclusions	19
6.2 Recommendations	20
6.3 Acknowledgements	20
7 References	21

Notation

Symbols

h	height (m)
\dot{h}	dh/dt (m/s)
H	transfer function
K	gain
K_e	equivalent pilot gain for SPM
K_1	proprioceptive feedback gain for SPM
Y	transfer function
ε	rel. amount of integral action for SPM (-)
θ	pitch attitude (deg or rad)
τ_0	time delay (s)
ω	frequency (rad/s)
ω_c	crossover frequency (rad/s)
ω_n	natural frequency (rad/s)
ζ	damping ratio (-)

Subscripts

C	controlled element (=helicopter)
h	height
int_h	integral of height
NM	Neuro Muscular
OL	Open Loop
P	Pilot
PF	Proprioceptive Feedback
req	required

Abbreviations

COM	Crossover Model
FTM	(ADS33D) Flight Test Manoeuvre
HQR	Handling Qualities Rating
OCM	Optimal Control Model
PID	Proportional-Integral-Derivative
SPM	Structural Pilot Model



This page is intentionally left blank

1 Introduction

Since helicopters have inherently poor handling qualities, analysis of these qualities is of major importance. In recent years a modern set of handling qualities requirements and criteria, ADS33D, have been set up by the US Army (Ref. 2). It uses, among other things, so called Flight Test Manoeuvres (FTMs) for assessing handling qualities of helicopters.

It would be interesting to fly these FTMs with a helicopter simulation program. This would either require a human or a pilot model to 'fly' the simulation. The disadvantage of a human is in the area of repeatability. If the human flies the same manoeuvre twice, there will be at best two slightly different manoeuvres. A mathematical pilot model does not have this disadvantage. Moreover, for a human pilot expensive real-time simulation is required, whereas a pilot-model can be simulated off-line.

Such a model will lead to a clearer insight into the execution of manoeuvres by human pilots. Ultimately the model could generate pilot handling qualities ratings. Since cues for determining the different phases in each manoeuvre are essential in the pilot model, this will also allow the fidelity of cues, provided by a flight simulator, to be investigated analytically.

Therefore, the goal of this research is to develop a pilot-manoevr model, with human pilot aspects, for flying prescribed manoeuvres with a helicopter.

First, a literature study was performed to investigate existing pilot models. Next, a non-linear, six degrees-of-freedom helicopter simulation was created, to be used as a tool in developing and testing the pilot-manoevr model. A structure for the pilot model was defined and implemented. With this pilot/helicopter model two FTMs were simulated, the accel/decel and the sidestep. The helicopter modelled is the Eurocopter BO-105, since DLR flight test data of ADS33D Flight Test Manoeuvres was available for this type of helicopter.

2 Literature study

A number of pilot models can be found in literature. One of the earliest models is the Crossover Model (Ref. 3). According to this model the pilot will adjust his control behaviour to the dynamics of the system he is controlling, such that the open-loop characteristics of the combination of pilot and controlled system can be described by (Ref. 3):

$$H_{OL}(\omega) = H_p(\omega) \cdot H_c(\omega) = \frac{\omega_c \cdot e^{-j\omega\tau_c}}{j\omega}$$

In this equation ω_c is the crossover frequency, at which the amplitude of H_{OL} equals one. The time constant τ_c is the equivalent time delay due to information processing by the pilot.

The advantages of the Crossover Model are that it works well, certainly well enough for engineering applications and that it is simple. The disadvantages are that it is only valid around the crossover frequency and that it is only valid for compensatory tracking tasks.

Another model is the Optimal Control Model (OCM). The main assumption of the Optimal Control Model is that a well-trained, well-motivated human operator behaves in an optimal manner, subject to his inherent limitations and to the requirements of the control task (Ref. 4).

An advantage of the Optimal Control Model is that it can be used for a wide range of frequencies (as opposed to the Crossover Model). Furthermore the OCM is more suited for situations in which there is very limited information on pilot behaviour: the OCM gives information on which cues are important in the manoeuvre.

On the other hand the disadvantage is that the translation of a practical situation to theoretical OCM parameters is not simple. This often leads to a large number of assumptions to be satisfied. Furthermore, the OCM parameters cannot be estimated directly from experimental data (this can be done for the Crossover Model).

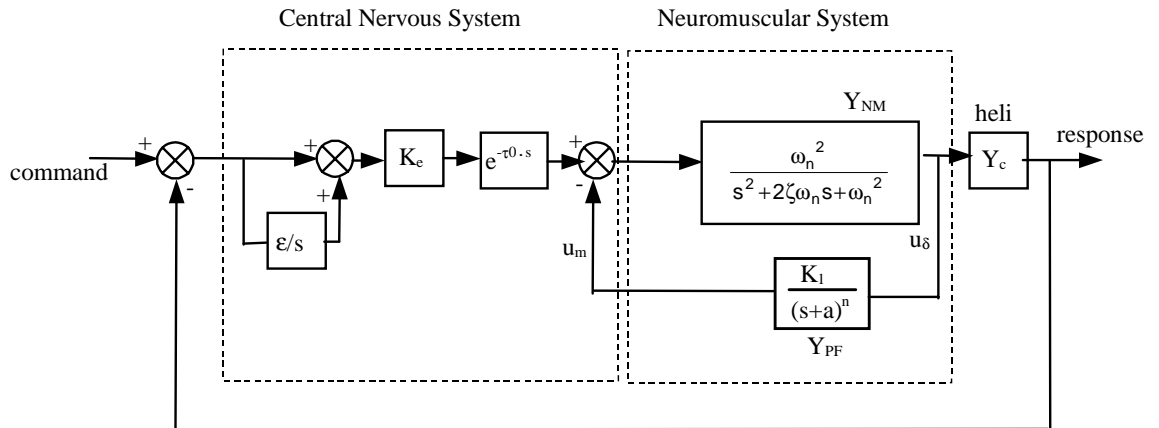


Figure 1: The Structural Pilot Model (reproduced from Ref. 1)

A third interesting model is the Structural Pilot Model (SPM, Ref. 1). Essentially this is the same as the Crossover Model. However, it was developed to give a more realistic representation of the signal processing structure in the pilot. The model consists of two parts (Fig. 1):

1. The central nervous system: a gain (K_c), time delay ($e^{-\tau}$) and an integrator for low frequency trim (ϵ/s).
2. The neuromuscular system: a second order system representing the limb-manipulator (e.g.: arm-stick) dynamics (Y_{NM}) and a feedback loop to represent the proprioceptive (signals regarding posture and motion of the body) feedback (Y_{pf}) of the muscle spindles (muscle length transducers).

The SPM can be used for attitude control. Outer control loops (such as heading control) can be implemented by using PID-controllers (Ref. 5).

Advantages of the Structural Pilot Model are that for single-axis, compensatory tracking the model correlates well with test data (Ref. 6) and that it is valid over a wider frequency range than the Crossover Model. Moreover, it is a description of processes as they are found or suspected in a pilot. According to Hess and Sunyoto (Ref. 7) one of the model variables correlates reasonably well with subjective pilot ratings. Finally, quite a large number of parameters in the model can be assumed to be constant, mainly the parameters in the neuromuscular transfer function. This reduces the number of parameters to be determined considerably.

A disadvantage of the SPM is that like with the Crossover Model, the SPM is only valid for compensatory tracking tasks. Moreover, the variable for predicting pilot ratings is dependent on the unit of pilot output (stick-%, stick displacement, control force) and therefore it is difficult to distinguish between different aircraft.

Besides the models mentioned before (COM, OCM and SPM) a number of other models can be found in literature. Most of these models use classic feedback theory, sometimes enhanced with non-linear elements, gain schedule or inclusion of human pilot restrictions (e.g. a maximum roll angle). A number of the more recent models investigate the use of artificial intelligence for their pilot model.

Only one reference has been found of a model for long duration (several minutes or longer) flying tasks (the Westland HELMSMAN model, Ref. 8). Even this model uses only PID controllers and no 'real' pilot model like the OCM or COM.

From the literature study the following conclusions are drawn regarding the pilot-models discussed above. The Optimal Control Model is too complicated for the development of an extensive pilot model. The use of the OCM is especially convenient if nothing is known about

how to fly a manoeuvre. That is not the case in this report, the manoeuvres to be flown are well defined in the ADS-33 document.

The Crossover Model is simple, not over-parameterised and should be applicable.

The Structural Pilot Model is essentially the same as the Crossover Model, however more interesting, since it reflects the information processing in the human body. Therefore the SPM was applied in this research.

Since the pilot-manoeuve model has to be capable of flying prescribed manoeuvres, two example ADS33D Flight Test Manoeuvres have been selected: the accel/decel and the sidestep. The reasons for choosing these are:

1. Both are aggressive manoeuvres, so they will induce much cross coupling and will require helicopter and pilot operating at the limits of capability.
2. Both manoeuvres vary in flight condition from hover to forward/sideward flight, so the rapidly varying handling qualities of the helicopter will play a role.
3. The accel/decel is mainly a longitudinal manoeuvre, while the sidestep is a lateral manoeuvre. In both manoeuvres, apart from longitudinal and lateral cyclic, the collective and pedal controls are important as well. By choosing these manoeuvres, all control axes are represented.

According to the ADS33D document (Ref. 2), the accel/decel manoeuvre starts from hover, then a high performance (fast) acceleration is performed to a speed of 50 knots, followed by a high performance (fast) deceleration ending in a hover again. During the manoeuvre the altitude, heading and lateral track have to be maintained within certain limits. The length of the course depends on the performance of the helicopter it is flown with.

The sidestep manoeuvre starts from a hover as well. An aggressive lateral translation is performed with a bank angle of at least 25 degrees. Upon reaching the maximum allowable lateral airspeed (within 5 knots), or 45 knots, an aggressive deceleration back to hover is performed with a bank angle of at least 30 degrees. After hovering for 5 seconds the manoeuvre is repeated in the opposite direction. During the manoeuvre the height, heading and longitudinal track have to be maintained within certain limits.

3 Structure of the pilot model

Before implementing the pilot model in a program, a clear structure has to be defined. This is based on the three piloting functions as distinguished by Padfield (Ref. 9):

1. Navigation (Long-term course and altitude control)
2. Guidance (Mid-term velocity or position control)
3. Stabilisation (Short-term attitude control)

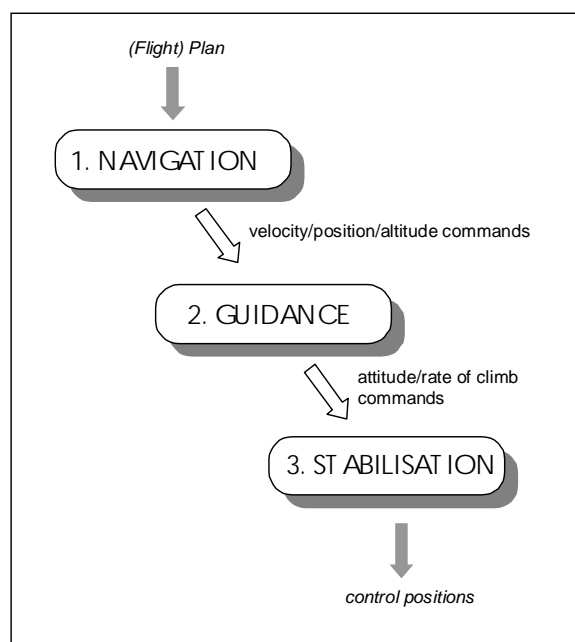


Figure 2: Overview of proposed structure for the pilot model.

This is represented in figure 2. First, at the level of navigation, the pilot makes decisions about which actions to take next, depending on his navigation plan, in a very general sense. This does not have to be a flightplan, but can also be a vague idea of where to go (“let’s go to that lake over there”). Goals are set for the next level of control: where should the aircraft be guided next, resulting in velocity or position commands.

The second level, guidance, tries to achieve the speed and/or position commands set by the highest level, navigation. This is done by setting attitude commands for the third and lowest level of control.

Finally, at the stabilisation level control positions are generated from these attitude commands.

A practical example of these three levels is:

1. The flight plan or the Air Traffic Controller orders the pilot to go to a new waypoint. The pilot knows from the map or the Flight Management System what the required course should be to reach that waypoint. This is navigation.
2. The pilot decides what the roll angle should be to achieve the new course. If the new course is close to the current course, the required roll angle will be small. If it is further away, the required roll angle will be larger. However, it will never be larger than the maximum, dictated by the flight manual, comfort of the passenger or how aggressive the pilot wants to manoeuvre. This is guidance: the aircraft is guided to the new course.
3. On the lowest level, the pilot uses the stick to achieve the required roll angle. He will do this without having to think about it. He knows the response of the aircraft to his stick input

through training and experience. This is stabilisation: the aircraft is stabilised around the required attitude.

Implementation of the structure

Navigation

The navigation level involves conscious decisions by the pilot regarding the action next to be taken. It would require artificial intelligence to automate this level, which is complicated. Therefore, user-defined directives are used. This means that the user of the pilot/helicopter simulation program will have to divide the manoeuvre into phases (e.g.: hover, acceleration, deceleration, etc.). For each of these phases he has to decide which intermediate (guidance) goals have to be achieved (e.g.: heading, speed, altitude commands). The user has to do this by thorough analysis of the manoeuvre. Three sources have been used in this research. First of all, the ADS33D document gives a good initial impression of how the manoeuvre has to be flown. Secondly, pilots were interviewed about how they fly the manoeuvre and which phases they discern. Finally, DLR flight test data was available to inspect closely how a manoeuvre is flown. For the accel/decel manoeuvre this analysis resulted in the following five phases:

1. Initial hover
2. Acceleration
3. Flare deceleration
4. Collective pull deceleration
5. Final hover

The sidestep was divided into seven phases:

1. Initial hover
2. First sideward acceleration
3. Sideward deceleration
4. Intermediate hover
5. Second sideward accel. (opposite direction)
6. Sideward deceleration
7. Final hover

Guidance

The goals generated by the navigation level are fed to the next level, guidance. These goals are transformed into attitude commands, through PID-controllers. The gains of the PID-controllers were determined manually.

An example of such a PID controller is the altitude hold by controlling pitch attitude (which is in its turn controlled by the longitudinal SPM):

$$\theta_{req} = K_h \cdot (h_{req} - h) + K_{int_h} \int (h_{req} - h) dt + K_{h\dot{}} \cdot \dot{h}$$

Examples of PID controllers are altitude hold with collective, altitude hold with longitudinal cyclic, longitudinal position hold, lateral position hold, heading hold, etc.

Stabilisation

The attitude commands from the guidance level are fed into the stabilisation level, consisting of the Structural Pilot Model mentioned before. This stabilisation level outputs stick positions, which are fed into the helicopter simulation program.

The parameters of the SPM are obtained by using a MATLAB program provided by Hess (Ref. 10). For this purpose the non-linear helicopter simulation has to be linearised. Subsequently the SPM parameters can be calculated by requiring the neuromuscular system to have a certain damping and by requiring the helicopter/pilot model to satisfy the Crossover Model. A separate SPM exists for all four control axes: longitudinal and lateral cyclic, pedals and collective. These SPMs are implemented in SIMULINK and linked into the MATLAB simulation. An example of the SIMULINK implementation can be seen in figure 3. The time delay was deleted due to stability problems. It has been recognised that its actual implementation will be very beneficial for the model fidelity. This has to be investigated in further detail.

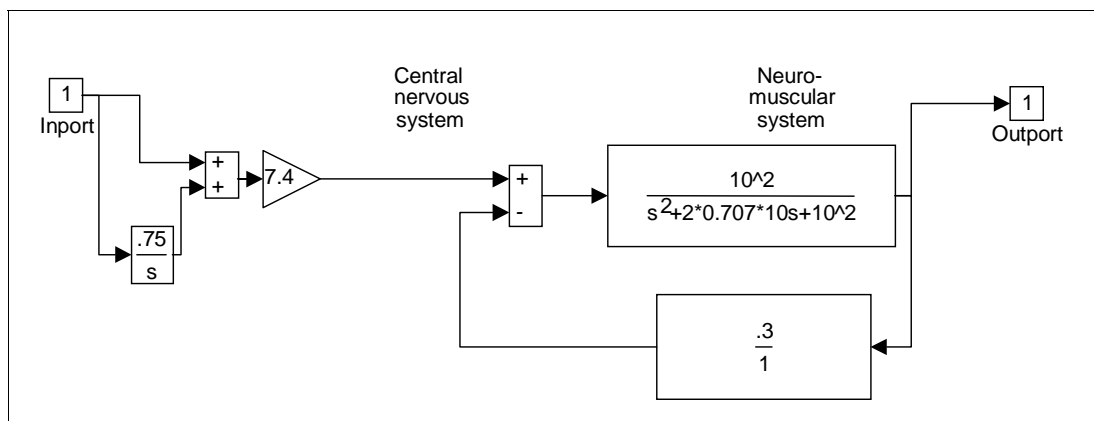


Figure 3: Structural Pilot Model implementation in SIMULINK for the collective cyclic.

4 Helicopter model

The helicopter used to tune and develop the pilot model is the Eurocopter BO-105 (Fig. 4). The BO-105 was chosen because ADS33 manoeuvre data for this type was available. This flight test data was generously provided by the German Aerospace Center, DLR.

A six degrees-of-freedom, non-linear simulation for the BO-105 was developed, with the following features:

- Analytical, steady-state flapping equations for the main rotor.
- Main rotor forces and moments are calculated using analytical blade element equations.
- Main rotor inflow is assumed to be uniform.
- Tail rotor is modelled as an actuator disc.
- Fuselage, horizontal and vertical tails are modelled with linear aerodynamics.
- No engine model is included (engine is assumed to always and instantaneously deliver the power required).



Figure 4: Eurocopter BO-105 (Courtesy Medical Air Assistance b.v.)

The helicopter model is validated against a full blade element simulation of the BO-105 in FLIGHTLAB. Validation was done for trimmed and dynamic flight and for some frequency responses. This validation procedure showed good agreement for the on-axis responses and fair agreement for the off-axis responses.

5 Simulation results of the helicopter/pilot model

The simulation results have been compared to DLR flight test data. The simulated manoeuvre and real flight test manoeuvre are not exactly the same. These differences are either due to a difference in implementation (the flight test pilot and the pilot model use a slightly different technique) or due to differences in the helicopter modelling (the flight test pilot and the pilot model fly slightly different helicopters).

In all the figures there are vertical, dashed lines with a number on top. These denote the start of the different phases of the manoeuvre. So, the line with number 5 on top indicates the starting time of phase 5.

5.1 ADS33D accel/decel manoeuvre

The first simulated manoeuvre was the ADS33D accel/decel. In figure 8 the on-axis response parameters can be found. Graph 8a shows longitudinal cyclic, which is closely related to the pitch attitude in graph 8d. Clearly simulation and flight test data have the same trend. Initially the helicopter is pushed nose down to accelerate. Then it is pulled up a bit, followed by more nose down cyclic to correct for the increasing airspeed. In phase 3 (deceleration) the helicopter is rotated nose up to a maximum pitch attitude of 32° . Subsequently it is pushed over into a hover. In phases 3 and 4 it was very difficult to maintain height in the simulation. Graph 8b shows the airspeed. Flight test data starts at 8 m/s, probably due to the airspeed measurement probe being in the downwash of the main rotor. Collective is shown in graph 8e. In the simulation during phases 2, 3 and 4 the collective is not controlled by the Structural Pilot Model. It is constant (phase 2) or has a fixed rate (phases 3 and 4). This rate determines the aggression for performing the manoeuvre. When the pilot pulls collective aggressively, a fast acceleration is the result. In the simulation, the rate has been adapted to match the flight test data.

At the start of phase 5 collective is used to recover to the required height (7.5 m). This can be seen in graph 8c. Initially the height increases due to the aggressive collective pull. When decelerating, the helicopter has a strong tendency to sink, also in the flight test data. In the simulation it was very difficult to control height in the deceleration. Finally graph 8f shows the longitudinal position. The simulation lags behind flight test by about 15 meters. There is a little overshoot (4 m) in position before stabilising into the hover. This is also seen in the flight test data.

Figure 9 shows the off-axis responses for the accel/decel manoeuvre. In graph 9a the lateral cyclic position can be found. The pilot model uses much less lateral cyclic input than the real pilot. This is due to the rather simple helicopter model presently used. The resulting roll angles are found in graph 9b. The magnitude is about the same for simulation and flight test. However,



Figure 5: 3-D representation of acceleration phase at 1-second intervals.

the trend is not identical. Especially in phase 4, the roll angle of the simulation is the opposite of the flight test roll angle. This might be a dynamic inflow effect, which is not modelled. Graph 9c shows the resulting lateral positions, which are of the same magnitude as well. Graph 9d shows the pedal position. Generally, the trend of the simulation pedal position is the same as in flight test. Graph 9e shows the resulting heading angle. Again, the trend is about the same. Around the start of phase 4, a large deviation in heading of the simulation can

be seen. Probably, this indicates that the use of feedforward (anticipation) is required.

Ockier and Gollnick (Ref. 11) describe the results of ADS-33 flight-testing. About the accel/decel manoeuvre they state that none of the test pilots achieved *desired* performance. This is also apparent in the pilot model. The average HQR issued by the pilots was 5.3. Power and rotor speed management were considered most difficult. The aggressive, 30° nose-up deceleration, combined with the requirement to hover over a designated spot, was considered problematic. This is visible in figure 9f, where both the real and simulated pilot make a slight overshoot. Yaw control is problematic as well.

In general the accel/decel manoeuvre can be reasonably well 'flown' with the pilot model. It could be improved by adding feedforward to improve heading control.

In figure 5 a three-dimensional representation of the simulated acceleration phase is shown. The helicopter position and attitude is shown at 1-second intervals. The helicopter noses down and accelerates. Initially some height is gained, due to the sudden collective pull.

In figure 6 the simulated deceleration phase is depicted three-dimensionally. The helicopter has a high nose-up attitude to decelerate. Subsequently the pitch attitude is changed to the hover attitude. At the same time collective

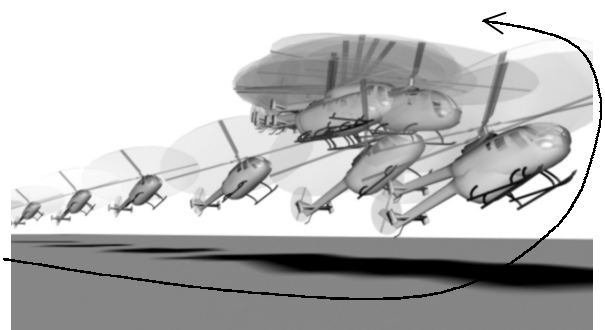


Figure 6: 3-D representation of the deceleration phase at 1-second intervals.

is applied to recover to the original hover height (7.5 m). The overshoot, mentioned before, can be seen. When decelerating the helicopter moves back a little, about one fuselage length.

5.2 ADS33D sidestep manoeuvre

With the structure as defined before, the sidestep manoeuvre was simulated. Figure 10 and figure 11 show the simulation results, together with the DLR flight test data.

Figure 10 shows the on-axis parameters for the sidestep manoeuvre. In graph 10a it can be seen that the lateral stick position for the simulation follows the same trend as in flight test. The resulting roll angle (graph 10d) is almost equal in both cases. The resulting lateral speed in graph 10b is nearly identical as well. The lateral position is shown in graph 10e. Initially the simulation position is equal to that in flight test. The intermediate hover positions are about 3 meters apart (from 9 to 17 seconds), on a total distance of 40 meters. The simulation starts the return to the original hover position (phase 5) a little earlier. At the final hover (phase 7), the simulation has some overshoot (4 m), while the flight test run shows some 'undershoot' (3 m). Graph 10c shows the collective, necessary for maintaining height. Clearly the collective movements are larger in the simulation. A possible reason for this might be the use of feedforward and anticipation by the real pilot. He anticipates the rising of the helicopter at the start of the deceleration. Therefore he will not correct when the helicopter descends just prior to the deceleration, while the pilot model will do that. The use of anticipation and feedforward was not investigated in this report. In graph 10f the resulting height can be seen. The height deviations are slightly larger in the simulation, again an indication that anticipation is required.

Figure 11 shows the off-axis parameters for the sidestep simulation. Graph 11a shows the longitudinal stick input. Input in the simulation is much less than it was in the flight test. The resulting pitch attitude is shown in graph 11b. The magnitude is the same for simulation and flight test. However, the trend is not identical. Again, this is probably largely determined by restrictions of the simple helicopter simulation. Graph 11c shows the longitudinal position. This figure was obtained by integration of the accelerations. Due to inaccuracies in this postprocessing procedure, the result contains a large component from the lateral acceleration and is therefore unreliable. The position varies between +2 and -7 meters.

Graph 11d shows the pedal position required to maintain heading. Simulation and flight test data show the same trend. In graph 11e very large heading deviations, from -45° to $+35^\circ$ can be seen. This is definitely unacceptable in real flight. The flight test heading is calculated from the yaw rate. The deviations are about $\pm 10^\circ$. The large deviation in the simulation indicates the use of feedforward of collective to pedals (anticipation) is required. It shows as well that this manoeuvre is very aggressive.

Ockier and Vollnick (Ref. 11) describe pilot reactions for the sidestep manoeuvre. The average HQR was 6.3, which is worse than the HQR for the accel/decel (HQR was 5.3) as mentioned before. They write: “*The sidestep manoeuvre is a very aggressive manoeuvre at the edge of the BO-105s capabilities.*” None of the pilots achieved *desired* performance. With this manoeuvre, rotor speed/power control and yaw control was considered difficult. The simulation results are in agreement with these observations.

In general it was harder to tune the sidestep manoeuvre than the accel/decel. The lateral parameters are matched acceptably for the sidestep. For height and heading control anticipation is required, so both collective and pedal inputs need feedforward. From the difference in the pilots’ HQR and the difference in ease of implementation for the pilot model, we see that the sidestep is a more aggressive manoeuvre than the accel/decel.

Figure 7 shows a three-dimensional representation of the first part of the simulated sidestep. The manoeuvre starts at the left of the picture. The roll angle is increased to accelerate. In the middle part of the picture the roll angle is nearly zero again. To decelerate, the roll angle is increased aggressively, resulting in an increase in height. This can be seen in the right part of the picture. Finally the helicopter stabilises in a hover.

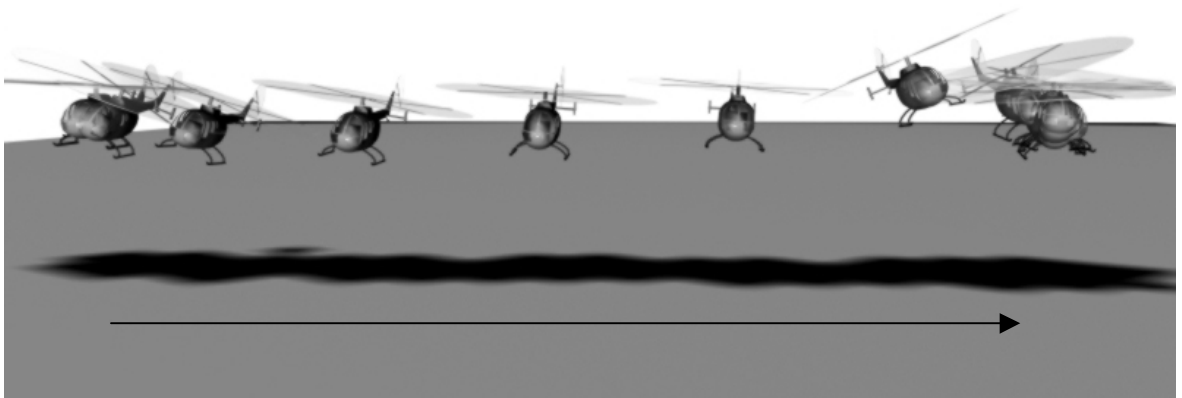


Figure 7: 3-D representation of the first part (0-15 sec) of the sidestep manoeuvre at 1 sec intervals (moving from left to right).

6 Conclusions and recommendations

6.1 Conclusions

A pilot model has been developed, which is capable of flying prescribed manoeuvres with a helicopter model. With respect to the pilot-manoeuve model the following observations can be made.

1. Feasibility of the pilot model for executing manoeuvres with a helicopter was demonstrated. This was proven by the simulation of two ADS-33 flight test manoeuvres, the accel/decel and sidestep manoeuvres. The simulations were tuned by comparison to flight test data, provided by the German Aerospace Center (DLR).
2. Simulation of manoeuvres with the pilot model is possible. However, performing such a simulation requires a lot of time consuming analysis and tuning.
3. The proposed structure (navigation, guidance and stabilisation functions) works well for the simulation of the sidestep and accel/decel manoeuvres. It was slightly easier to tune the accel/decel manoeuvre than the sidestep. Due to the aggressive nature of both manoeuvres, timing is essential, just like it can be in real flight. Timing is reflected in the navigation level of the pilot model.
4. The division of the accel/decel and sidestep manoeuvres in respectively 5 and 7 phases appears to be valid.
5. The navigation level is considered the most important level. This level models the conscious processes in the pilot. Therefore, the manoeuvre to be simulated should be thoroughly analysed. Knowledge of piloting technique is required as well. It is this extensive analysis that makes the program less suitable for quick analysis of pilot or helicopter behaviour in new manoeuvres.
6. Generally the pilot model worked quite well. During aggressive parts of the simulated manoeuvres, however, it appeared that addition of feedforward control would improve the behaviour of the model. This applies particularly to heading control and height control.
7. The Structural Pilot Model (SPM), used for the lowest level stabilisation functions, works well. Although fixed gains are used, based on the hover transfer functions, this does not seriously impact the pilot model behaviour. Implementation of the SPM for the collective, longitudinal cyclic and pedals was relatively straightforward. The lateral SPM however showed slight oscillations and slow convergence to the required roll angle. This also had its effect on guidance functions that used the lateral SPM. This could be either the helicopter model or the pilot model.

6.2 Recommendations

With regard to the pilot model the following recommendations are made.

1. To complete the Structural Pilot Model, its time delay (τ_0) should be implemented. Thus, the full effect of the SPM can be investigated and the human behaviour is implemented more completely.
2. Presently, the SPM gain is determined using the transfer functions in hover only. Instead of using a constant gain, a gain schedule could be used, depending on speed.
3. The possibility of predicting pilot opinion ratings should be examined. This was already done by Hess, however, never for such a complete pilot model.
4. The pilot model was used assuming perfect observation. An investigation of the influence of non-perfect observation would be interesting.
5. Feedforward control should be implemented to investigate the effect of anticipation in the pilot model.
6. Combining the pilot model with a more complete helicopter simulation model than currently used will provide a better basis for comparison with flight test data

6.3 Acknowledgements

This research was performed in the framework of a graduation project at the Faculty of Aerospace Engineering at the Delft University of Technology. The author would like to thank his mentors, both at the Faculty of Aerospace Engineering and at the National Aerospace Laboratory (NLR).

7 References

1. Hess, R.A., "Unified Theory for Aircraft Handling Qualities and Adverse Aircraft-Pilot Coupling". Journal of Guidance, Control and Dynamics, Vol. 20 No 6 1997, pp 1141-1148.
2. ADS-33D, "Handling Qualities Requirements for Military Rotorcraft". U.S. Army Aviation and Troop Command. St. Louis: July 1994.
3. McRuer, D.T.; Krendel, E.S., "Mathematical Models of Human Pilot Behavior." AGARDograph No. 188, Neuilly sur Seine: 1974.
4. Hosman, R.J.A.W., "Mens-Machine Systemen in Lucht- en Ruimtevaart" (Human Factors in Aerospace, in Dutch, lecture notes). Delft: 1994, Faculty of Aerospace Engineering.
5. Hess, R.A., "Theory for Aircraft Handling Qualities Based Upon a Structural Pilot Model" Journal of Guidance, Control and Dynamics, Vol. 12, No. 6, 1989, pp. 792-797.
6. Hess, R.A., "Structural Model of the Adaptive Human Pilot" Journal of Guidance, Control and Dynamics, Vol. 3, No. 5 1980, pp 416-423.
7. Hess, R.A.; Sunyoto, I., "Toward a Unifying Theory for Aircraft Handling Qualities" Journal of Guidance, Control and Dynamics, Vol. 8, No. 4 1985a, pp. 440-446.
8. Hamm, J., "The development of helicopter pilot models to control engineering simulations" London: Royal Aeronautical Society, 1994.
9. Padfield, G.D., "Helicopter Flight Dynamics (The theory and application of flying qualities and simulation modelling)" Oxford: Blackwell Science Ltd., 1996.
10. Hess, R.A.; Zeyada, Y., "PVD, Pilot/Vehicle Dynamics" Matlab program manual. University of California, Davis, USA.
11. Ockier, C.J.; Gollnick, V., ADS-33 Flight Testing – Lessons Learned. AGARD Conference Proceedings 592, Advances in Rotorcraft Technology, Ottawa, 27-30 May 1996. NATO: AGARD-CP-592, April 1997.

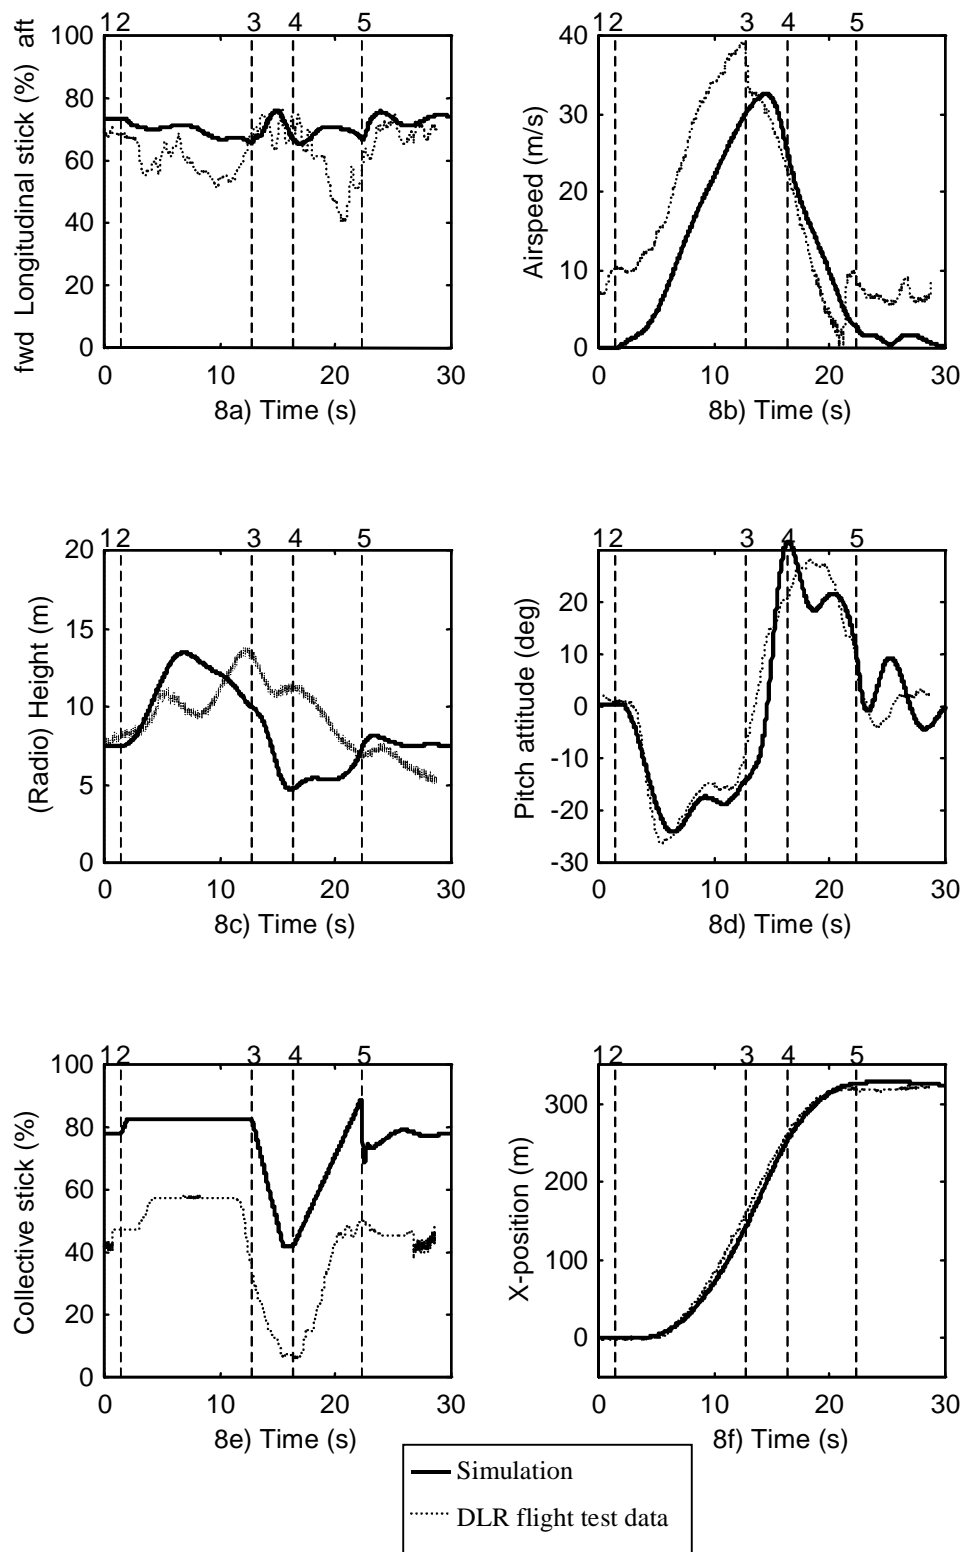


Figure 8: On-axis responses for the accel/decel simulation.

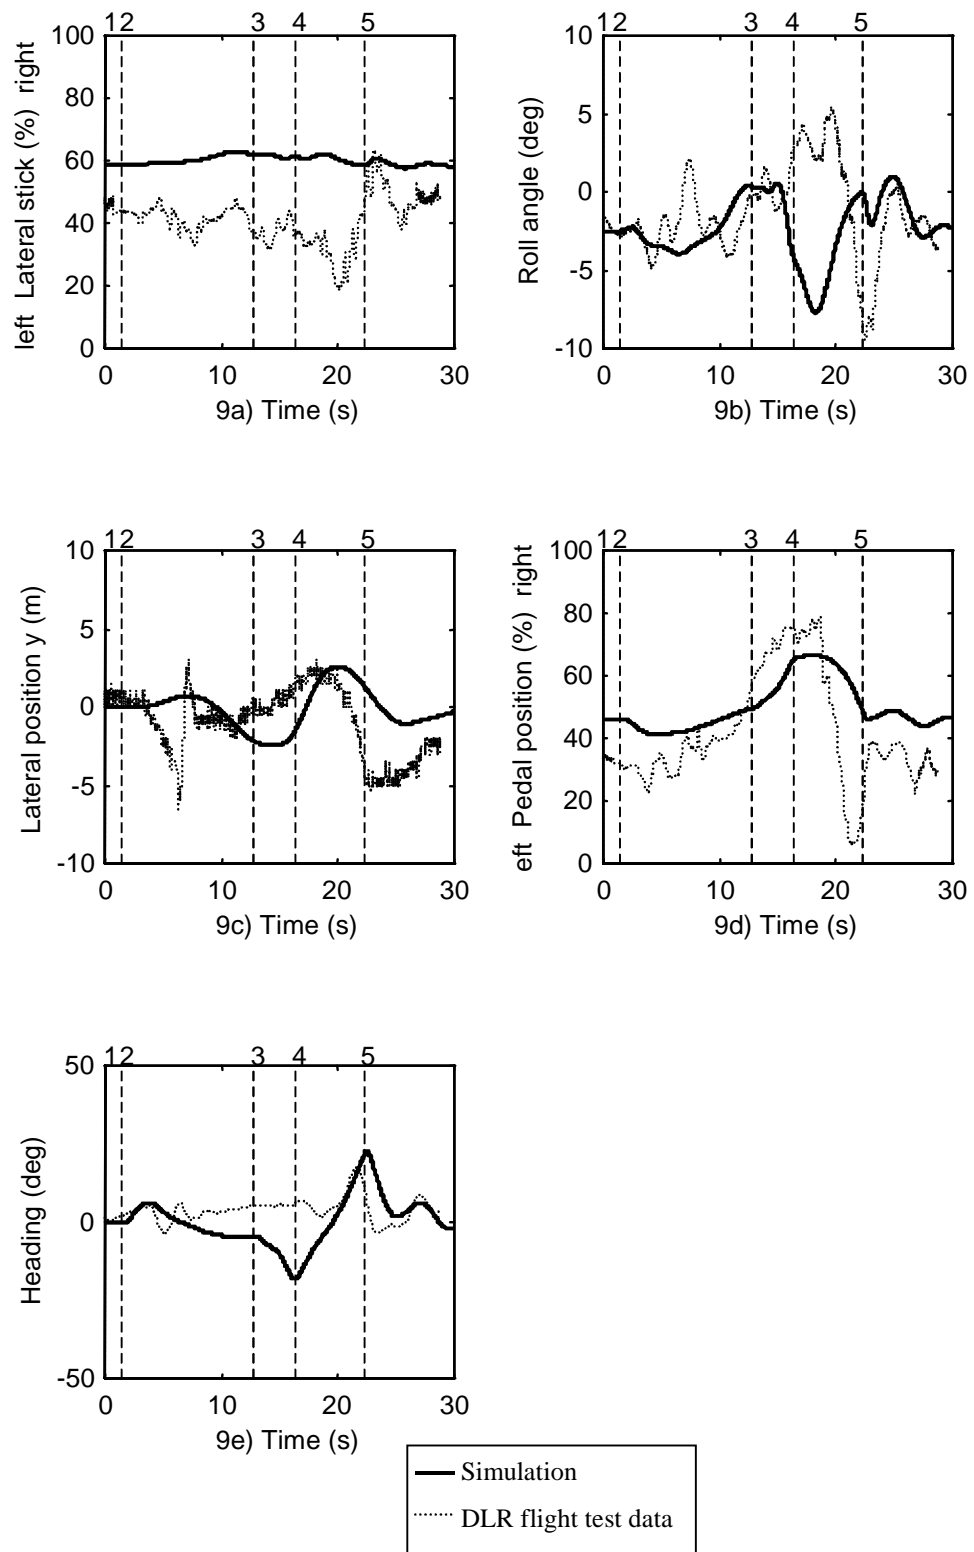


Figure 9: Off-axis responses for the accel/decel simulation.

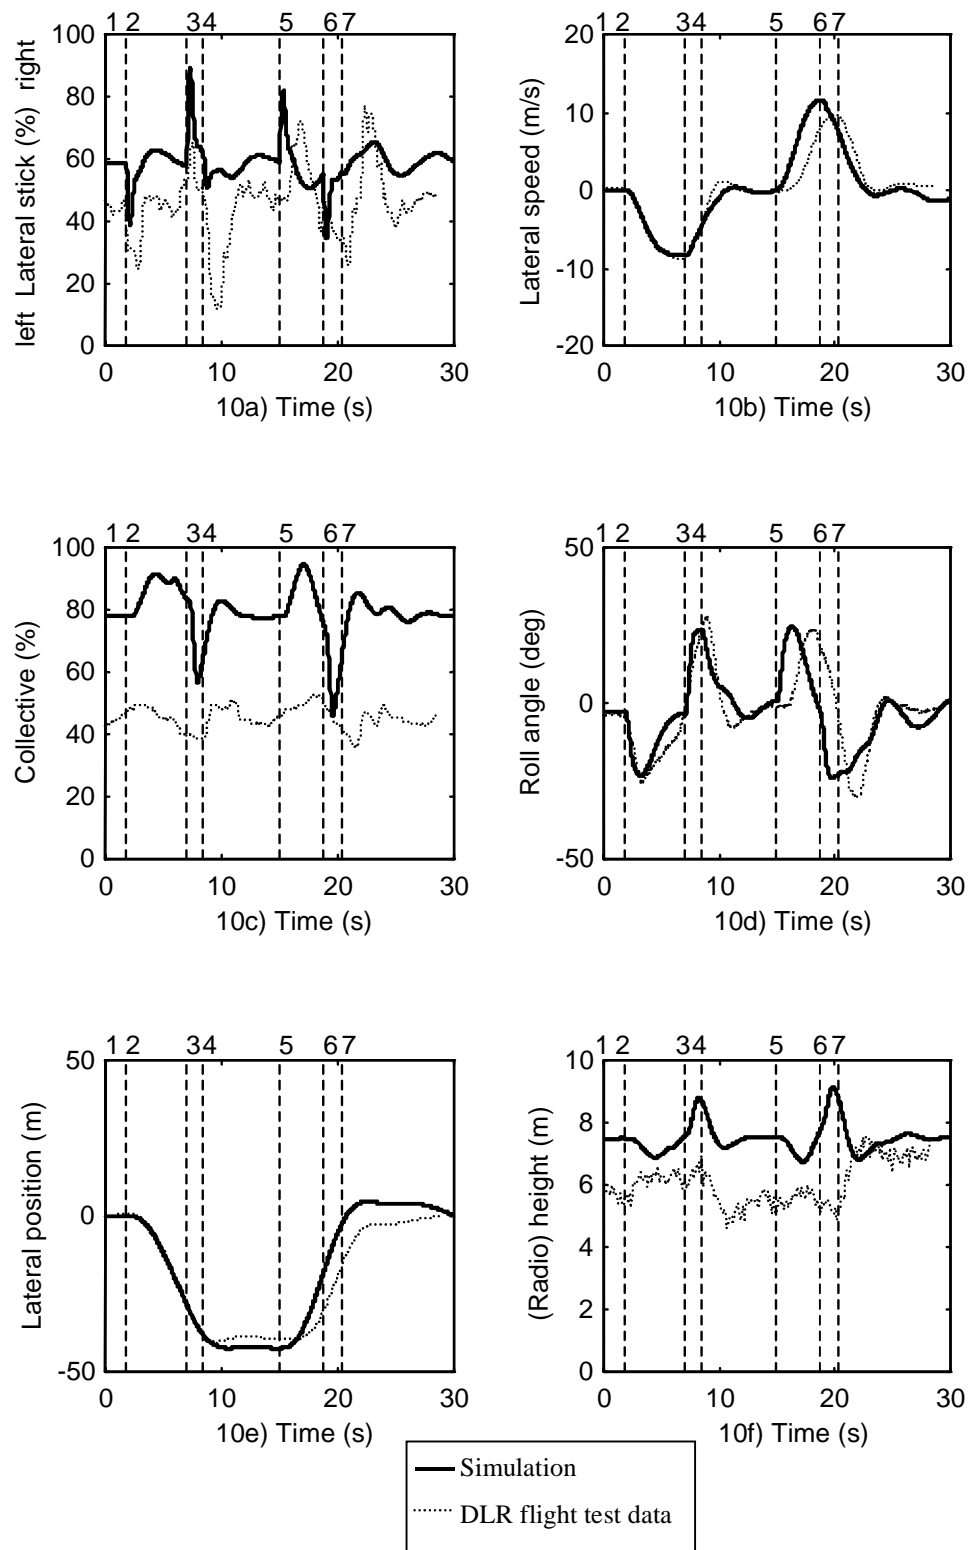


Figure 10: On-axis responses for the sidestep simulation.

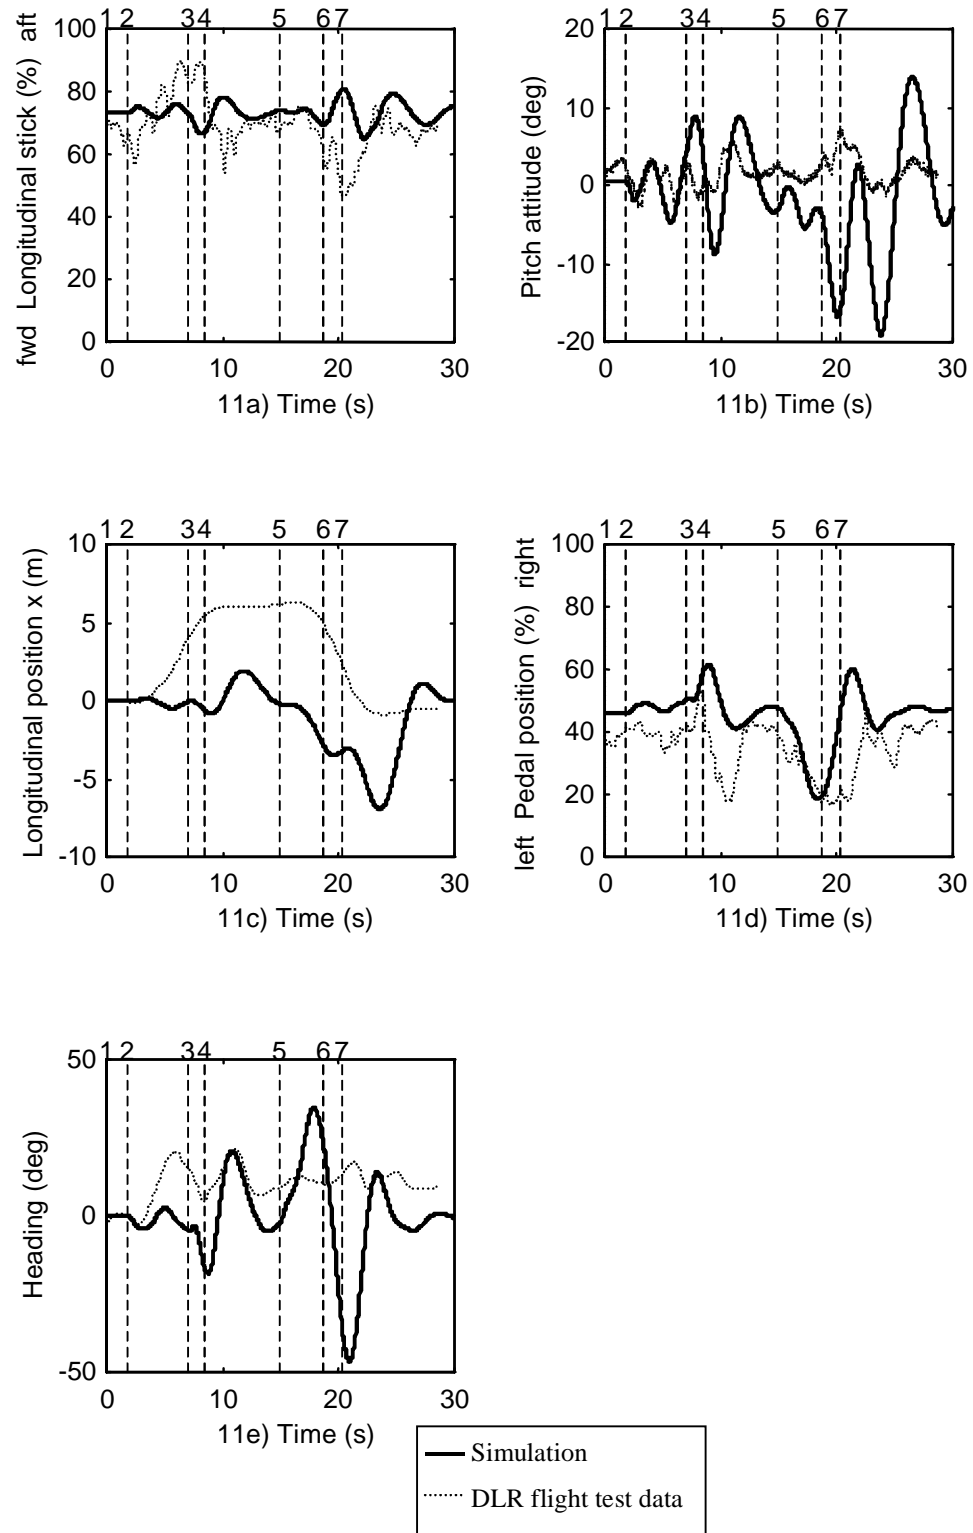


Figure 11: Off-axis responses for the sidestep simulation.