



NLR-TP-2001-627

Geometric and probabilistic approaches towards Conflict Prediction

G.J. Bakker, H.J. Kremer and H.A.P. Blom



NLR-TP-2001-627

Geometric and probabilistic approaches towards Conflict Prediction

G.J. Bakker, H.J. Kremer and H.A.P. Blom

This report is based on a presentation held at the Third USA/Europe Air Traffic Management R&D Seminar, Naples, Italy, June 2000.

The contents of this report may be cited on condition that full credit is given to NLR and the authors.

Division:	Air Transport
Issued:	December 2001
Classification of title:	Unclassified



Contents

1	Introduction	3
2	Conflict prediction approaches	3
3	Collision risk modeling	5
4	Comparison of the approaches	5
5	Discussion of the results	9
6	Conclusion	11
7	References	12



Geometric and probabilistic approaches towards conflict prediction

G.J. Bakker, H.J. Kremer, H.A.P. Blom

National Aerospace Laboratory NLR

P.O. Box 90502 1006 BM Amsterdam, The Netherlands

Email: bakker@nlr.nl, blom@nlr.nl

Abstract

In this paper four conflict prediction approaches are considered: a classical geometric approach, two variations of a probabilistic approach developed by Paielli & Erzberger, based on conflict probability and overlap probability and a novel probabilistic approach. The objective of all conflict prediction approaches is to evaluate a set of planned or predicted trajectories on their conflict potential and to supply other ATM subsystems with the conflict information. The classical geometric approach and approaches based on conflict probability and overlap probability are briefly reviewed. The novel probabilistic approach is described and explained in more detail. Simulation results for ATM examples are provided and compared for the four approaches on flexibility of usage and imposed restrictions on aircraft behaviour.

1 Introduction

In this paper, the conflict prediction part of conflict probing will be considered. We will consider four approaches concerning conflict prediction. The first approach is the classical geometrical approach, the second approach is the probabilistic approach described by Paielli & Erzberger ([1], [2]), the third approach is a variation of the second approach and the fourth approach is a novel probabilistic approach, which is based on collision risk formulae ([3]).

The objective of all conflict prediction approaches is to evaluate a set of planned or predicted trajectories on their conflict potential and to supply other ATM subsystems with the conflict information. In this paper the focus will be on the detection of conflicts between predicted aircraft trajectories in ATM.

When predicting aircraft trajectories, the prediction uncertainty increases with the prediction period. This is caused by the fact that prediction errors accumulate over time. It is assumed that the trajectories that predict the future aircraft behaviour are 4D trajectories. A 4D trajectory is defined by predicted 3D positions and corresponding predicted time that are given for all points on that trajectory. These 4D trajectory predictions are evaluated on their conflict potential.

This paper will compare the mentioned conflict prediction approaches with which conflict potential is evaluated for pairs of predicted 4D trajectories. It is a continuation of [4]. The paper is organized as follows.

First the classical geometric conflict prediction approach will be considered. Some limitations will be highlighted which create the reason why we will study probabilistic conflict prediction approaches. The first probabilistic conflict prediction approach that will be considered is based on conflict probability ([1], [2]). This approach will briefly be reviewed. The second probabilistic approach is based on overlap probability and is introduced as a variation of the first probabilistic approach. The third probabilistic approach that will be considered is based on collision risk formulae ([3]). This approach will be explained briefly.

Issues as flexibility of usage and restrictions on aircraft behaviour of the four approaches will be discussed and conclusions will be drawn.

2 Conflict prediction approaches

2.1 Geometric conflict prediction approaches

The classical geometric conflict prediction approach that is performed on a pair of predicted 4D trajectories will be considered. Input for the geometric conflict prediction is the predicted 4D trajectory. The uncertainty of the predicted 4D trajectory is translated into areas around the predicted trajectory. Let us refer to these areas as protection zones. The protection zones are such that at any time in the future, the probability that an aircraft is inside its protection zone is larger than some threshold. The size and shape of the protection zones may vary with time. The protection zones for the horizontal plane and for the vertical plane are defined independently. Horizontal and vertical distances between protection zones should be such that it is safe. Two aircraft are said to be in "geometric" conflict when the distance between the protection zones of those aircraft becomes smaller than the minimum allowed distance between them (e.g. defined by ICAO). Information as the duration (e.g. time interval in which two aircraft are in "geometric" conflict) and minimum distance between the protection zones can be generated (e.g. [5] and [6]).

2.2 Limitations of geometric approaches

Let us start by considering various causes that result in aircraft deviating from their predicted 4D trajectories.



These causes exist in all parts of ATM, some examples are:

- wind modeling and prediction errors
- tracking, navigation and control errors

Large wind modeling and prediction errors can result in aircraft that deviate from their predicted trajectory. The same result applies for large tracking, navigation and control errors. Conflict prediction methods predict aircraft deviations from their predicted trajectory and on the basis of this prediction, conflict potential is evaluated. Geometric conflict prediction approaches translate the mentioned prediction uncertainties in areas around the predicted aircraft positions (protection zones). The main limitation of this geometric approach to conflict prediction is its tendency to be overly conservative in handling uncertainties in aircraft behaviour. For example, climbing or descending aircraft are given a lot of moving space. To improve conflict prediction, uncertainties should be handled less conservative than geometric approaches handle them. However, uncertainties should still be handled conservative enough to keep the sky safe.

The key attribution of this paper, is that the mentioned limitation of geometric approaches towards conflict prediction can be overcome by an appropriate probabilistic approach. Furthermore, using probabilistic conflict prediction, more information about conflicts or encounters can be provided (e.g. probabilities, collision risks), which can be exploited for an improved quality of the decision whether there is a conflict or not. (Thus one might expect the number of false and missed conflicts to reduce). So there is a clear reason to study probabilistic conflict prediction approaches.

In this paper three probabilistic approaches are discussed. The first probabilistic approach is the conflict probability approach ([1], [2]). The second probabilistic approach is a variation of the first probabilistic approach and is based on overlap probability (also based on the method described by Paielli & Erzberger ([1], [2])). The third probabilistic approach is based on collision risk formulae ([3]). There are some basic differences between the probabilistic approaches. These differences will become clear when the approaches are described.

2.3 Conflict probability approach

Paielli & Erzberger ([1], [2]) have developed a method to evaluate conflict probabilities. The approach is initially developed to predict conflicts in the horizontal plane only. In their approach a conflict is defined as a situation in which the separation between aircraft falls below a certain separation threshold. Evaluation of conflict potential is done based on the evaluated conflict probabilities.

In [1] and [2] the conflict prediction is focussed on free flight. The future deviations of the aircraft from the predicted 4D trajectories are predicted by probability density functions. Paielli & Erzberger realized that in free flight the further you predict a trajectory in the future, the less certain these predictions are. Note that this does not need to be the case in the 4D ATM philosophy in which aircraft are kept within some boundaries around their planned 4D trajectory.

In the case of free flight, the decision whether aircraft will approach each other too close is seen as a trade-off between efficiency and certainty. To optimize this trade-off, Paielli & Erzberger have developed a method to describe the certainty. The approach aims to predict the probability that the separation between two aircraft falls below a certain separation threshold (e.g. ICAO separation standards). This probability is called conflict probability. The goal is to keep the conflict probability below some acceptable level. In order to evaluate the conflict probability, Paielli & Erzberger assume that it is realistic to model the deviations of the aircraft from their predicted positions by normally distributed probability density functions. Using the direction of the relative velocity at time of minimum predicted separation, the probability density function of the relative position at time of minimum predicted separation is obtained. An analytical expression is obtained to estimate the conflict probability. For a more extended treatment the reader is referred to [1] or [2].

2.4 Overlap probability approach

So far, the approach described in [1] and [2] is used to predict the probability that the separation between two aircraft falls below a threshold that is determined by (e.g. ICAO) separation standards, this probability is called conflict probability. If however for this threshold a value like the size of an aircraft is used, then the same approach yields the overlap probability. So overlap probability follows from a variation of the approach developed by Paielli & Erzberger; with the threshold reduced to the size of an aircraft, the overlap probability reflects the probability that the aircraft physical volumes overlap.

2.5 Collision risk approach

In our novel probabilistic approach, the conflict potential is evaluated through collision risk formulae ([3]), which are a generalized version of Reich collision risk approach ([7]) adopted by ICAO. The generalizations have been developed since the Reich model applies under rather restrictive assumptions only.

The resulting collision risk equals the probability of collision between two aircraft. The steps that have to be taken in the novel approach are as follows. First the joint probability density functions of the positions and



velocities of individual aircraft are predicted, then the joint probability density function of the relative position and velocity of an aircraft pair is evaluated, then the collision risk for the aircraft pair is evaluated using the Generalized Reich collision risk equations. This novel collision risk approach will be briefly elaborated next.

3 Collision risk modeling

3.1 Generalized Reich collision risk model

In this section we briefly discuss the Generalized Reich collision risk model without going too much into the mathematical details. For a detailed description we refer to [3] and [8].

Let the stochastic process $\{s_t^i\}$ represent the position of the center of aircraft i , and let $\{v_t^i\}$ represent its velocity.

Next, with s_t^i and s_t^j representing the positions of the centers of aircraft pair (i,j) , the relative position is represented by the process $s_t^\Delta = s_t^i - s_t^j$, and the relative velocity is represented by the process $v_t^\Delta = v_t^i - v_t^j$.

Now we define an in-crossing of a certain area D around the origin as follows. The relative position s_t enters D at time t , if

$$s_{t-\Delta} \in D^c \text{ and } s_t \in D \quad \text{for } \Delta \downarrow 0$$

where D^c is an open set in R^3 and equals the complement of D . Each entering of D by the relative position s_t is called an in-crossing.

The in-crossing rate is defined as the expected number of in-crossings at time t per unit time and is denoted by $\varphi(t)$. In [3], the in-crossing rate is defined as

$$\varphi(t) = \lim_{\Delta \downarrow 0} \frac{P\{s_t \in D, s_{t-\Delta} \in D^c\}}{\Delta} \quad (1)$$

We can express the collision risk between aircraft (probability of an in-crossing) for a time period $[t_1, t_2]$, denoted by $P_{ic}(t_1, t_2)$, as follows [3]:

$$P_{ic}(t_1, t_2) = \int_{t_1}^{t_2} \varphi(t) dt \quad (2)$$

In [3] a characterization of the in-crossing rate $\varphi(t)$ has been derived under very general conditions. This model is called the Generalized Reich collision risk model, in which it is assumed that the process $\{s_p, v_t\}$ admits a

density function $p_{s_t, v_t}(\cdot)$. For numerical evaluation of $\varphi(t)$ there is a need to characterize the probability density function $p_{s_t, v_t}(s, v)$ for the relative position s_t and the relative velocity v_t . Characterizing this probability density thus is an important part of the collision risk prediction problem.

3.2 The Gaussian case

To be able to compare the collision risk approach with the other approaches, we will assume that the position and velocity of each individual aircraft is Gaussian distributed with some mean and covariance. Using the well-known fact that a linear combination of Gaussian variables is also Gaussian, it is clear that the relative position and velocity are also Gaussian distributed. Using the Gaussian probability density function of relative position and velocity the in-crossing rate (1) can then be evaluated.

Next the collision risk approach, the conflict probability approach, the overlap probability approach and the classical geometrical approach will be compared by applying them to Gaussian ATM examples.

4 Comparison of the approaches

First of all it should be noted that the collision risk approach deals with the problem of conflict (collision) prediction in a 3D sense: horizontal and vertical movements are incorporated, also when they are not independent of each other. This implies a significant improvement over geometric approaches where the horizontal and vertical distances between protection zones are monitored independently and the conflict prediction approach of Paielli and Erzberger, which tends to define the probability of a horizontal conflict or overlap independently from the probability of a vertical conflict or overlap.

Next, the conflict prediction approaches are compared with each other by applying them to a 2D example that was already described by Paielli & Erzberger in [1]. In the described ATM example aircraft move in the horizontal plane only.

4.1 Situation and modelled uncertainties

In the examples, some parameters that define the situation can be distinguished. How and which parameters were taken, is explained below. The exact values of the appropriate parameters are given in the sections where the examples are discussed.

The probability density functions of the positions of the aircraft at a certain time are characterized by the



predicted positions and their uncertainties in the across-track and along-track direction (the uncertainties are assumed to be Gaussian distributions, so they are characterized by the standard deviations). The deviations in along-track and across-track direction are assumed to be independent of each other.

The positions of both aircraft are predicted in time. The expected magnitude of the groundspeeds are assumed to be constant for both aircraft. The predicted across-track uncertainty in position (standard deviation) is for both aircraft constant. The predicted along-track uncertainty in position (standard deviation) is for both aircraft zero at current time and increases linearly in time (given by a growth rate). The routes that can be formed by connecting the predicted aircraft positions, are straight lines in the horizontal plane which cross each other, except for a path angle of zero degrees in which case the aircraft are predicted to fly on parallel routes.

The situation described above is visualized in Figure 1. All conflict prediction approaches will be applied to the above situation. In the simulations we have evaluated:

1. the predicted minimum distance between protection zones around the aircraft (classical geometric approach, e.g. [5] and [6])
2. the conflict probability (see [1], [2])
3. the overlap probability (version of [1], [2] with threshold at 50 m)
4. the collision risk following our novel approach

The threshold where the geometric approach and the conflict probability approach defined by Paielli & Erzberger are based on, is taken 5 nautical miles (5 nmi is the currently used ICAO separation standard for en-route airspace). The threshold used for evaluating the overlap probability is set to 50 m. The novel probabilistic approach needs extra input parameters; the across-track standard deviation of the velocity, the along-track standard deviation of the velocity and the size of the boxes which represent the aircraft. For these parameters, some reasonable values were used: standard deviation of the velocity is in both of the above directions 2% of the groundspeed and independent of each other. The length and width of the box enclosing one aircraft are taken 50 meter. The collision risk is evaluated for the time interval which starts 5 minutes before the aircraft reach their minimum predicted separation until 5 minutes after they have reached their minimum predicted separation. In the geometric approach, the size of the protection zone is defined as a box whose length is equal to along-track standard deviation of position and whose width is equal to the across-track standard deviation of position. The length of the box lays in the predicted velocity direction.

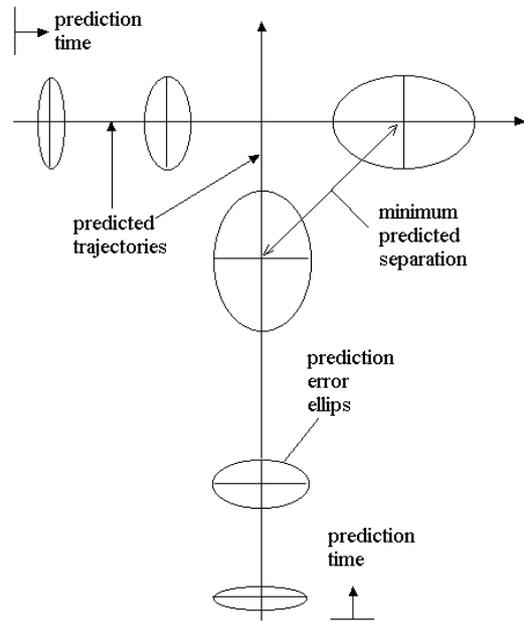


Figure 1 ATM example in the horizontal plane.

The evaluation of the minimum predicted distances between the protection zones, the conflict probability, the overlap probability and the collision risk can be done for various sets of simulation parameters. Performance of the conflict prediction approaches in various situations are compared by varying the following simulation parameters:

- minimum predicted separation
- path crossing angle
- predicted groundspeed of the aircraft
- time before minimum predicted separation
- growth-rate of the along-track standard deviation of position
- across-track standard deviation of position

The results of some examples will be shown.

4.2 Example 1

In this example, from [1], the minimum predicted separation between the aircraft is 6 nmi. The path angle between the predicted aircraft routes is 90 degrees. The predicted groundspeed magnitude of both aircraft is 480 kts. The time before minimum predicted separation is varied from 40 minutes to 1 minute. The growth rate of the along-track standard deviation of position is 15 kts for both aircraft and the across-track standard deviation of position is 1 nmi and constant for both aircraft.

Result of varying the time before minimum predicted separation is that the along-track standard deviation of position at time of minimum predicted separation is varied from 10 nmi to 0.25 nmi.

In the geometric approach, the minimum predicted distances between the protection zones are evaluated. If a "geometric" conflict is detected, the probability of a



conflict is taken 1, otherwise it is taken 0. The geometric approach was used with a one-sigma value for the assumed area of aircraft; the length and width of the area is equal to the along-track respectively across-track standard deviation. Figure 2 shows the results of the geometric and conflict probability approach. Figure 3 shows the results of the conflict probability and the collision risk approach. In Figure 3 all curves are normalized (in order to fit within a linear scale figure). In order to make the difference between the probabilistic approaches more clear, we use a logarithmic scale to plot the results of the example, see Figure 4, for all three probabilistic approaches.

4.3 Example 2

In this example, also from [1], we change the minimum predicted separation between the aircraft from 6 nmi to 4 nmi in the set of simulation parameters for example 1. In Figure 5, conflict probability, overlap probability and collision risk are plotted using a log scale.

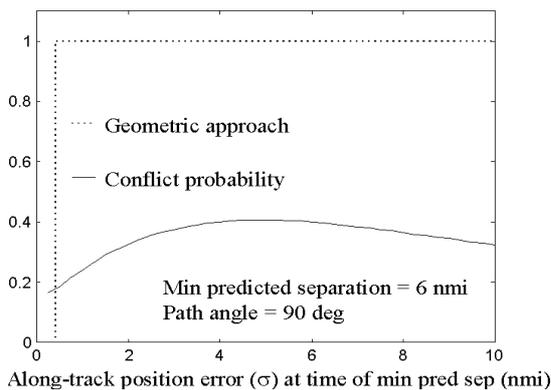


Figure 2 Geometric approach and conflict probability in example 1.

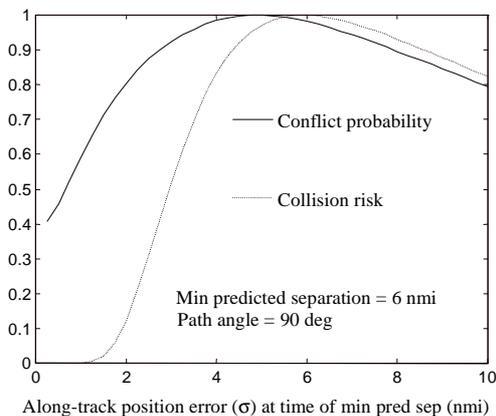


Figure 3 Conflict probability and collision risk in example 1 (normalized).

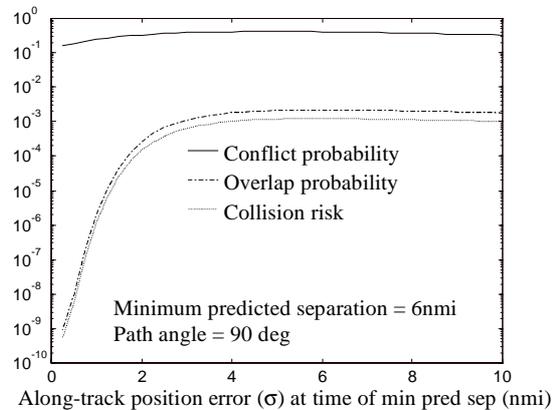


Figure 4 Conflict probability, overlap probability (with threshold reduced to 50 m) and collision risk in example 1 (log scale).

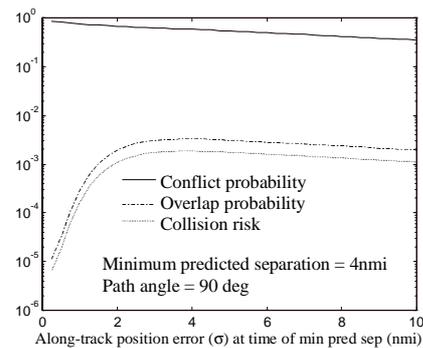


Figure 5 Conflict probability, overlap probability (with threshold reduced to 50 m) and collision risk in example 2 (log scale).

4.4 Example 3

In this example we further compare collision risk and overlap probability. The minimum predicted separation is 6 nmi. The path angle is varied from 0 to 360 degrees. The groundspeed of one aircraft is 420 kts and the groundspeed of the other aircraft is 480 kts. In all situations the faster aircraft crosses behind the slower aircraft (except for path angle zero when the routes are parallel). The time before minimum predicted separation is varied from 20 minutes to 1 minute. The growth rate of the along-track standard deviation of position is 10 kts for both aircraft. The across-track standard deviation of position is 1 nmi and constant for both aircraft. The overlap probability (threshold reduced to 50 m) and collision risk are evaluated. The results are given in Figures 6-9. In the 3D figures, the horizontal axes represent the time to minimum predicted separation (minutes) and the path angle. The position of one aircraft at time of minimum predicted separation is translated to (0,0) in the horizontal plane. All points on a circle in the horizontal plane represent the same time that this aircraft needs to fly from its



current position to its position at time of minimum predicted separation (0,0). So each point in the horizontal plane represents a possible position where one aircraft currently is. The heading of the other aircraft ("conflicting aircraft") is given in the figures. The vertical axis represents the overlap probability respectively the collision risk. In the 2D figures, the axes are the same as the horizontal axes of the 3D figures. Possible current positions of one aircraft relative to its position at time of minimum predicted separation are coloured according to the value of the overlap probability respectively collision risk (the colouring- scale is shown in the figures).

Figures 6 and 8 do not give a very clear view of the differences between overlap probability and collision risk. Figures 7 and 9, however do show a clear difference between overlap probability and collision risk, especially when the aircraft are close to the position where the predicted separation reaches its minimum. Therefore in Figure 10 the overlap probability and collision risk are evaluated for situations where the aircraft are 4 minutes before they reach their minimum predicted separation. The path angles are varied from 0 to 360 degrees. This figure shows a significant difference between overlap probability and collision risk.

4.5 Example 4

The situation simulated in this example is the same as was simulated for example 3, except for the fact that the faster aircraft now crosses before the slower aircraft instead of behind the slower aircraft.

The overlap probability (with threshold reduced to 50 m) and collision risk are evaluated for path angles between 0 and 180 degrees and the time before minimum predicted separation is 4 minutes. The overlap probabilities that were evaluated for the situations in example 3 and example 4 are the same. Figure 11 shows the overlap probabilities that were evaluated for the situation in example 3 and 4, the collision risk that was evaluated for the situation in example 3 and the collision risk that was evaluated for the situation in example 4.

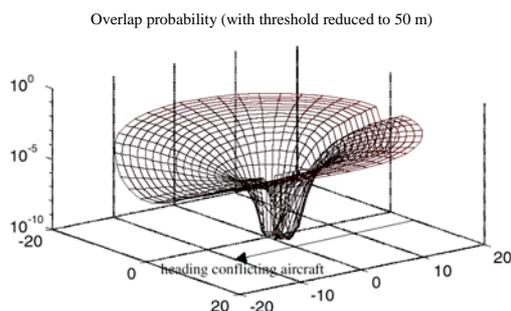


Figure 6 Overlap probability (z-axis) with threshold reduced to 50 m is represented for various path angles and times to minimum predicted separation (horizontal axis).

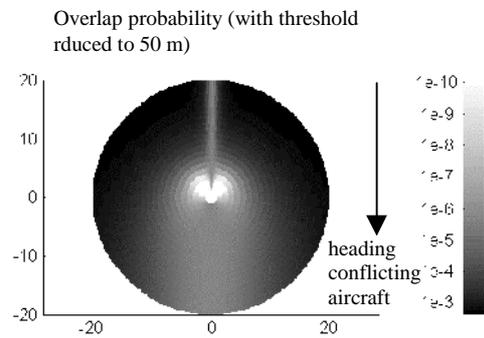


Figure 7 Overlap probability (with threshold reduced to 50 m) is represented by colours for various path angles and times to minimum predicted separation.

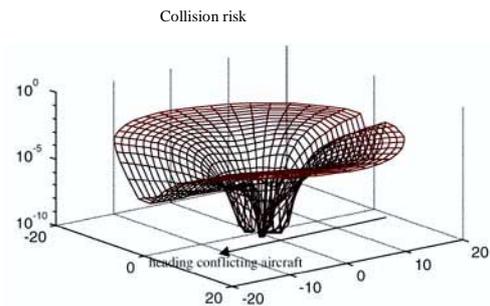


Figure 8 Collision risk (z-axis) is represented for various path angles and times to minimum predicted separation (horizontal axis).

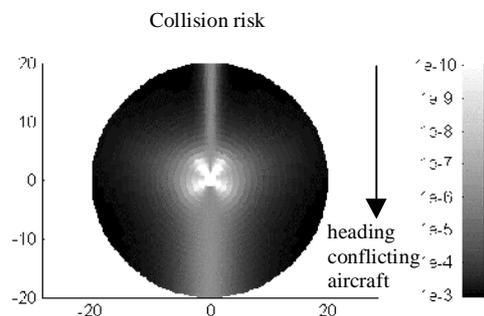


Figure 9 Collision risk is represented by colours for various path angles and times to minimum predicted separation.

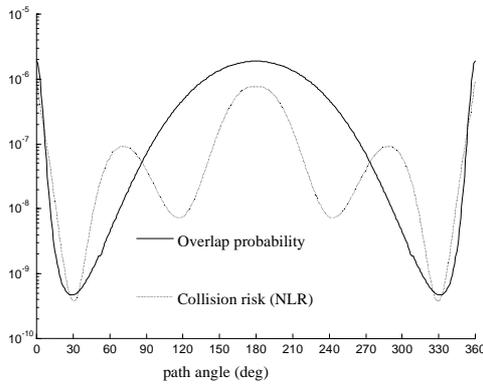


Figure 10 Overlap probability (with threshold reduced to 50 m) and collision risk for various path angles and 4 minutes before time of minimum predicted separation of 6 nmi.

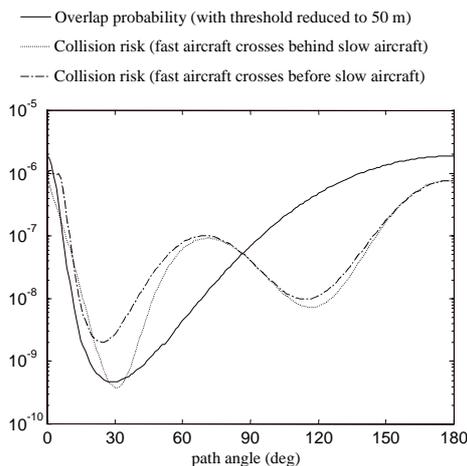


Figure 11 Difference between situations in which a faster aircraft crosses before or after a slower aircraft. Evaluated overlap probability (with threshold reduced to 50 m) and collision risk are shown.

5 Discussion of the results

5.1 Flexibility of usage

From the results of example 1 we can conclude that even with a protection zone that is represented by an uncertainty area of one-sigma only (70 % containment), the geometric approach does not show flexibility in its usage. It can be seen from Figures 2 and 3 that the probabilistic approaches show more flexibility to changes in along-track standard deviation of position. So let us zoom more into the probabilistic approaches.

In Figure 4 it can be seen that for large uncertainties in the along-track position the conflict probability, overlap probability and the collision risk are approximately equal sensitive to changes in the uncertainty. Thus for tools which concentrate on situations in which large uncertainties are common, all

probabilistic approaches can be used. A good example where large uncertainties are common, is a flow management tool. However, if the uncertainties in along-track position become smaller, collision risk and overlap probability are much more sensitive to changes in along-track uncertainty than conflict probability. When in Figure 4 the uncertainty in the along-track position decreases, the collision risk and overlap probability values decrease very fast to very small values, where conflict probability values decrease very slow. So in this example, when the aircraft get closer to the point of minimum predicted separation, the more flexible collision risk and overlap probability become than conflict probability. For small uncertainties, it is easier to separate safe situations from unsafe situations by using collision risk or overlap probability than conflict probability.

Paielli & Erzberger already concluded that conflict probabilities for minimum predicted separations below 5 nmi have a different shape than for minimum predicted separations above 5 nmi. If the minimum predicted separation is larger than 5 nmi, the shape of the conflict probabilities is as plotted in Figure 3 ; first with increasing along-track position uncertainty from zero, the conflict probability increases from zero to a maximum and then it decreases again. If the minimum predicted separation is smaller than 5 nmi, with increasing along-track position uncertainty from zero, the conflict probability decreases from its maximum monotonically towards zero. For collision risk and overlap probability such a distinction is not necessary as can be seen from Figures 4 and 5. For a minimum predicted separation of 4 nmi and 6 nmi, with decreasing along-track position uncertainties, the collision risk and overlap probability slowly increase to a certain maximum and then decrease to very small values. As result of the above we conclude that conflict probabilities can give no information with regard to the possible modifications of ICAO separation standards, where collision risk and overlap probability can.

5.2 Trade-off between velocity magnitude and period of encounter

Figures 4 and 5 show that in the simulated situations the overlap probability and collision risk have similar shapes. So in these situations they show similar flexibility in their usage. This can be explained as follows.

The overlap probability (and conflict probability) is evaluated based on a random indication of relative position and velocity. The magnitude of the relative velocity does not have any effect on the overlap probability (and conflict probability), only the direction of the relative velocity does. Implication of using a random indication for evaluation of the conflict and overlap probability is that the period of the encounter or possible conflict is not taken into account and thus



has no effect on the result. Uncertainty in relative velocity is also not taken into account.

Collision risk is evaluated from in-crossing rates integrated over time. On any moment in time, the magnitude, direction and uncertainty of the relative velocity are used for evaluation of the in-crossing rate at that time. So the magnitude, direction and uncertainty of the relative velocity are all incorporated in the collision risk. Implication of integrating the in-crossing rates over time is also that the period of encounter or possible conflict is incorporated in the collision risk.

In general, the magnitude of the velocity and the period of encounter or potential conflict will have opposite effects on the collision risk and no effect on overlap probability (and conflict probability).

This can be explained as follows. The faster the aircraft fly, the shorter the encounter or period of potential conflict will be. The larger magnitude of the relative velocity will enlarge the in-crossing rates during the period of encounter or possible conflict. The consequence of the smaller time period is a potential reduction of collision risk, where the larger in-crossing rates create a potential increase of collision risk. Collision risk will show a trade-off between these effects, overlap probability (and conflict probability) won't.

From the results given in Figures 4 and 5, it can be concluded that in these situations, the above trade-off is such that the two consequences balance each other out. This, however is not always the case.

From the results of Example 3 (Figures 6-10), it is straightforward that the overlap probability and collision risk are symmetric w.r.t. zero path angle i.e. overlap probability / collision risk in case path angle is β , is the same as in case path angle is $-\beta$. To obtain a complete picture of the situation, in the figures the results for all path angles between 0 and 360 degrees are given.

The overlap probability with threshold reduced to 50 m and collision risk are evaluated for various path angles and times to minimum predicted separation. The shapes of the light/dark areas in Figures 7 and 9 show a difference. From this difference, it can be concluded that the opposite effects of the magnitude of the velocity and the period of encounter or potential conflict are not always in balance. This is further explained by considering the overlap probability and collision risk on the 4-minute-circle (all positions on this circle represent a possible position of one aircraft 4 minutes before its position at time of minimum predicted separation).

The results are shown in Figure 10. In this figure, the focus is on the possible situations 4 minutes before time of minimum predicted separation. Overlap probabilities show that the worst situations are represented by 0 (or 360) and 180 degrees path angle.

The best situation is represented by 30 degrees path angle. Based on collision risk the worst situations are reached for path angles of 0 (or 360) and 180 degrees. The best situation is represented by 30 (or 330) degrees path angle. The path angles for which the collision risk really differs from the overlap probability (up to a factor 15) are the path angles between 30 and 180 degrees (or 330 and 180 degrees). Around 70 degrees path angle a local maximum in collision risk (local minimum in safety) is achieved and around 120 degrees a local minimum in collision risk appears. The above results can be explained by a trade-off between the magnitude of the relative velocity and the period of encounter or potential conflict.

The overlap probability is not capable to take the above described opposite effects into account. Collision risk however does take these effects into account. Example 4 shows the above mentioned trade-off when a faster aircraft crosses before a slower aircraft instead of crossing behind the slower aircraft, which was simulated in example 3. Figure 11 shows that overlap probability is the same for both cases, but collision risk differs significantly for path angles around 30 degrees. So collision risk can distinguish between the simulated situations and overlap probability can not.

5.3 *Imposed restrictions on aircraft behaviour*

Most conflict prediction approaches assume some restrictions on aircraft behaviour. In the geometric approach, the more dynamic the aircraft behaviour, the more difficult it is to define an appropriate deterministic protection zone around the aircraft and the more difficult is to evaluate distances between protection zones. Therefore geometric conflict prediction approaches tend to be complex in case of dynamic aircraft behaviour. To reduce complexity, most geometric conflict prediction approaches assume that aircraft fly in straight lines.

The probabilistic approach of Paielli & Erzberger yields a search for the moment of minimum predicted separation. It is assumed that the aircraft velocities and prediction errors are constant during the encounter or period of potential conflict. The conflict probability and overlap probability are derived from a random indication of the aircraft positions and velocities together with their uncertainty corresponding to the moment of minimum predicted separation. Therefore, dynamic aircraft behaviour may cause incorrect conflict or overlap probabilities.

The novel probabilistic conflict prediction approach is based on collision risk. Collision risk is evaluated from in-crossing rates integrated over time. At any moment in time, predicted aircraft positions and velocities together with their uncertainties are used for evaluation of the in-crossing rate at that time. The in-crossing rates are evaluated for the whole encounter or period of



potential conflict. Collision risk is derived from these in-crossing rates, thus incorporating all dynamics.

5.4 *Advanced application: dynamic spacing*

The conflict prediction approaches were compared by considering restrictions on aircraft behaviour, flexibility of usage and conservatism. Now an advanced application of the conflict prediction approaches will be discussed: dynamic spacing.

If the meteorological conditions change, the ATM system should be able to absorb this information and to translate it into use. If we focus on conflict prediction, in bad weather it may be needed to increase aircraft separations (spacing). One possible way to realize this is to change the separation threshold to a value that everybody agrees upon and use conflict prediction approaches that make use of this separation threshold (geometric approaches or conflict probability approach of Paielli & Erzberger).

Let us refer to methods that dynamically change the separation threshold according to changes in (meteorological) conditions, as dynamic spacing methods. A procedure could be that the right people judge (meteorological) conditions and select a certain separation threshold, based on their experience.

If dynamic spacing methods are developed and used in line with geometric or the conflict probability approach of Paielli & Erzberger, (meteorological) conditions should be translated into separation thresholds that apply for all aircraft. This way an ATM system can be created where the capabilities of highly equipped (expensive) aircraft are not fully used.

The overlap probability approach (variation of the method of Paielli & Erzberger) and the novel probabilistic approach use a probabilistic separation threshold. If the probability density function of position and velocity are given dependent on the (meteorological) conditions, conflict potentials will be predicted dependent on the (meteorological) conditions. In this approach, the dynamic spacing method yields that (meteorological) conditions are translated into probability density functions of position and velocity.

If dynamic spacing methods are developed in line with the novel probabilistic conflict prediction approach (or the overlap probability approach), every aircraft will be judged on its capability to navigate in current conditions. Using this probabilistic approach, spacing between two highly equipped aircraft may be smaller than the spacing between aircraft with less equipment on board. Thus making full use of all aircraft capabilities.

6 Conclusion

In this paper an overview is given of four conflict prediction approaches. The classical geometric approach, the conflict probability approach developed by Paielli & Erzberger, the overlap probability approach (a variant of the Paielli & Erzberger approach) and a novel probabilistic approach. The objective of all conflict prediction approaches is to evaluate a set of planned or predicted trajectories on their conflict potential and to supply other ATM subsystems with the conflict information.

The reason for studying probabilistic conflict prediction approaches is that the classical geometric approach tends to be overly conservative in handling uncertainties in aircraft behaviour. In the probabilistic conflict prediction models, modeling of the trajectory uncertainties causes the predictions to be less conservative. The conservatism that is seen as a limitation in the geometric approach, can be overcome by an appropriate probabilistic approach.

The first two approaches are briefly reviewed and the overlap probability approach is introduced. Overlap probabilities are evaluated with the threshold reduced to the size of an aircraft. The novel probabilistic approach is explained in more detail. The approaches are compared on various qualities. The results of the comparisons are summarized below.

In the studied examples, only 2D straight predicted flight paths were simulated. The reason for simulating straight flight paths, lays in the imposed restrictions on aircraft behaviour. Dynamic aircraft behaviour would cause large complexity in the classical geometric conflict prediction approach and may cause incorrect predictions in the conflict probability and overlap probability evaluated according to the approach of Paielli & Erzberger ([1], [2]). The novel probabilistic conflict prediction approach, based on collision risk formulae, however incorporates all aircraft behaviour.

The conflict prediction approaches were compared on flexibility of usage. Flexibility was judged on the amount of impact the input trajectory uncertainties have on the output of the prediction. The more sensitive the output of the prediction is w.r.t. changes in the input, the better the approach can distinct safe from unsafe situations. In this respect, the classical geometric approach showed the worst flexibility in its usage. The conflict probabilities proved to be much less sensitive to changes in the probability density functions than overlap probability and collision risk. Overlap probability and collision risk showed a lot of sensitivity to changes in the probability density functions, especially for small uncertainties in position. The latter makes overlap probability and collision risk extremely valuable in environments where small uncertainties in position are common (e.g. 4D ATM, Short Term Conflict Prediction).



In some situations the overlap probability and collision risk showed similar flexibility. However, the flexibility of the overlap probability and collision risk was not similar in all situations. This was explained by the trade-off between the period of encounter or potential conflict and the magnitude of the relative velocity. The overlap probability evaluated according to the method of Paielli & Erzberger, does not take the magnitude of the velocity and the period of encounter or possible conflict into account. The evaluated collision risk incorporates all aircraft behaviour, so also magnitude of velocity and period of encounter or potential conflict are taken into account (and the trade-off between them). An ATM example was simulated where this trade-off made a difference. Evaluated collision risks indicated that for some path angles it would be safer for a fast aircraft to cross behind a slower aircraft than crossing before the slower aircraft. Overlap probabilities could not distinguish between these situations.

For an ATM system to make full use of (meteorological) conditions information, dynamic spacing methods are necessary. Briefly, this means that known (meteorological) conditions are translated in an amount of space that is necessary to separate aircraft such that it is safe. If the classical geometric approach or the conflict probability approach of Paielli & Erzberger is used, dynamic spacing methods need to be developed that translate (meteorological) conditions in separation thresholds. This means that all aircraft are treated equal, which induces no full use of (expensive) aircraft equipment. If the overlap probability or the novel probabilistic approach is used, dynamic spacing means that models need to be developed that represent aircraft behaviour in all (meteorological) conditions. These approaches have the option of taking the quality of the equipment of individual aircraft into account, thus making full use of the aircraft equipment.

In the qualities described above, the novel probabilistic approach proves to be the most promising and enables other advanced applications such as the incorporation of the probability density functions for all possible (meteorological) conditions, and the incorporation of collision risk prediction capability into the ATM design.

7 References

- [1] Russel A. Paielli, Heinz Erzberger, "Conflict probability estimation for free flight", *Journal of Guidance, Control and Dynamics*, Vol. 20, No. 3, May-June 1997.
- [2] Heinz Erzberger, Russel A. Paielli, Douglas R. Isaacson, Michelle M. Eshow, "Conflict detection and resolution in the presence of prediction error", 1st USA/Europe Air Traffic

- Management R&D Seminar, Saclay, France, June 17-29, 1997.
- [3] G.J. Bakker, H.A.P. Blom, "Air traffic collision risk modelling". In *Proceedings of the 32nd IEEE Conf. on Decision and Control*, pp.,1464-1469, December 1993.
- [4] H.J. Kremer, G.J. Bakker, H.A.P. Blom, "Geometric versus probabilistic conflict probing", 1st U.S.A./Europe Air Traffic Management R&D Seminar, Saclay, France, 17-20 June 1997.
- [5] H.J. Kremer, W.C. Vertegaal, R.B.H.J. Jansen, "PHARE Advanced Tools Conflict Probe", Final Report, NLR, 1998.
- [6] A. Vink, C.J.M. de Jong, J.N.P. Beers, "Medium term conflict detection", Air Traffic Management R&D Seminar, Saclay - France, June 17-20, 1997.
- [7] P.G. Reich, "A theory of safe separation standards for Air Traffic Control", Technical report 64041, Royal Aircraft Establishment, U.K., 1964.
- [8] G.J. Bakker, H.J. Kremer, H.A.P. Blom, "Geometric and probabilistic approaches towards conflict prediction in ATM", submitted for publication.